

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000446

International filing date: 10 February 2005 (10.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0403322.1
Filing date: 14 February 2004 (14.02.2004)

Date of receipt at the International Bureau: 18 April 2005 (18.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/4B2005/000446



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

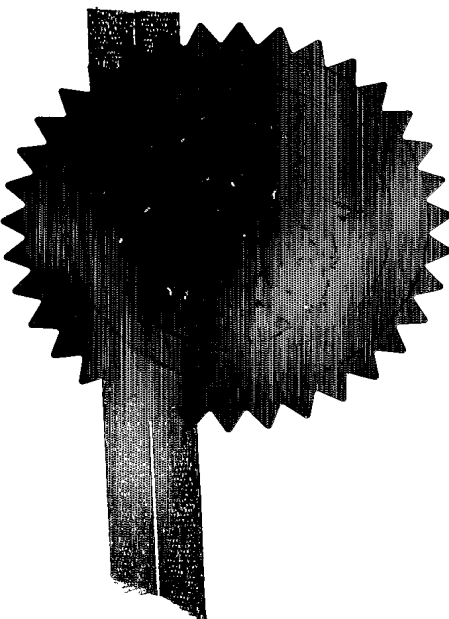

Signed

Andrew Gersey

Dated


31 March 2005



16FEB04 0073490-2 C12133
P01/7700 0.00-0403322.1 NONE

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

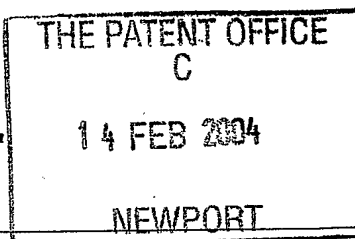

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

607

2. Patent application number

(The Patent Office will fill in this part)

0403322.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ELAM-T LIMITED
103 BOROUGH ROAD
LONDON
SE1 OAA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8105280001

4. Title of the invention

ELECTROLUMINESCENT MATERIALS AND DEVICES

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

COHEN, ALAN NICOL
2 GROVE PLACE
TATSFIELD
Nr. WESTERHAM
KENT
TN16 2BB

Patents ADP number (if you know it)

6963557001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

29

6

1

26 + 26 RM -

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

13-02-2004

12. Name and daytime telephone number of person to contact in the United Kingdom

A. N. Cohen

01959 577172

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Electroluminescent Materials and Devices

The present invention relates to electroluminescent materials and to electroluminescent devices.

5

Materials which emit light when an electric current is passed through them are well known and used in a wide range of display applications. Liquid crystal devices and devices which are based on inorganic semiconductor systems are widely used; however these suffer from the disadvantages of high energy consumption, high cost
10 of manufacture, low quantum efficiency and the inability to make flat panel displays.

Organic polymers have been proposed as useful in electroluminescent devices, but it is not possible to obtain pure colours; they are expensive to make and have a relatively low efficiency.

15

Another compound which has been proposed is aluminium quinolate, but this requires dopants to be used to obtain a range of colours and has a relatively low efficiency.

20

Patent application WO98/58037 describes a range of transition metal and lanthanide complexes which can be used in electroluminescent devices which have improved properties and give better results. Patent Applications PCT/GB98/01773, PCT/GB99/03619, PCT/GB99/04030, PCT/GB99/04024, PCT/GB99/04028, PCT/GB00/00268 describe electroluminescent complexes, structures and devices
25 using rare earth chelates.

US Patent 5128587 discloses an electroluminescent device which consists of an organometallic complex of rare earth elements of the lanthanide series sandwiched between a transparent electrode of high work function and a second electrode of low


- 2 -


work function with a hole conducting layer interposed between the electroluminescent layer and the transparent high work function electrode and an electron conducting layer interposed between the electroluminescent layer and the electron injecting low work function anode. The hole conducting layer and the electron conducting layer are required to improve the working and the efficiency of the device. The hole transporting layer serves to transport holes and to block the electrons, thus preventing electrons from moving into the electrode without recombining with holes. The recombination of carriers therefore mainly takes place in the emitter layer.

US Patent Application 2003/0194580 discloses electroluminescent iridium complexes.

We have now discovered different electroluminescent iridium organic complexes

According to the invention there is provided electroluminescent compounds of formula

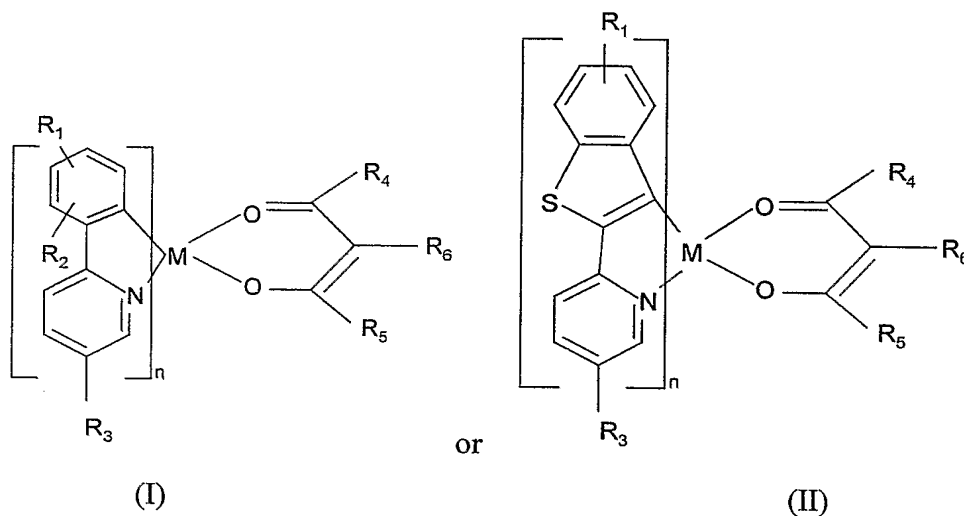

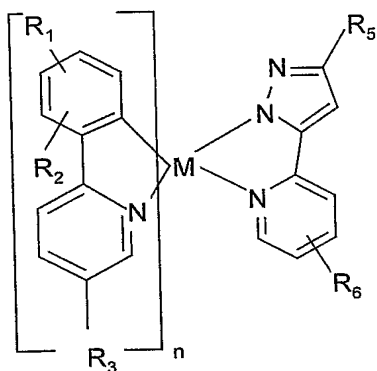


(III)

where R_1 , R_2 , R_3 , R_4 , R_5 and R_6 can be the same or different and are selected from hydrogen, and substituted and unsubstituted hydrocarbyl groups such as substituted and unsubstituted aliphatic groups, substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups; R_1 , R_2 and R_3 can also form substituted and unsubstituted fused aromatic, heterocyclic and polycyclic ring structures and can be copolymerisable with a monomer, e.g. styrene, and where R_4 and R_5 can be the same or different and are selected from hydrogen, and substituted and unsubstituted hydrocarbyl groups such as substituted and unsubstituted aliphatic groups, substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups; R_1 , R_2 and R_3 can also form substituted and unsubstituted fused aromatic, heterocyclic and polycyclic ring structures and can be copolymerisable with a monomer, e.g. styrene. M is ruthenium, rhodium, palladium, osmium, iridium or platinum and $n+2$ is the valency of M; preferably M is iridium and n is 2.


Examples of R_1 and/or R_2 and/or R_3 and/or R_4 and/or R_5 and/or R_6 include aliphatic, aromatic and heterocyclic alkoxy, aryloxy and carboxy groups, substituted and substituted phenyl, fluorophenyl, biphenyl, phenanthrene, anthracene, naphthyl and fluorene groups alkyl groups such as t-butyl, heterocyclic groups such as carbazole.

- 4 -


Preferred compounds (I) are those in which R_5 and R_6 form a



e.g.

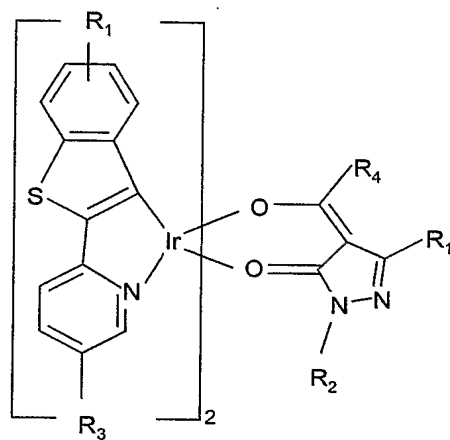

and

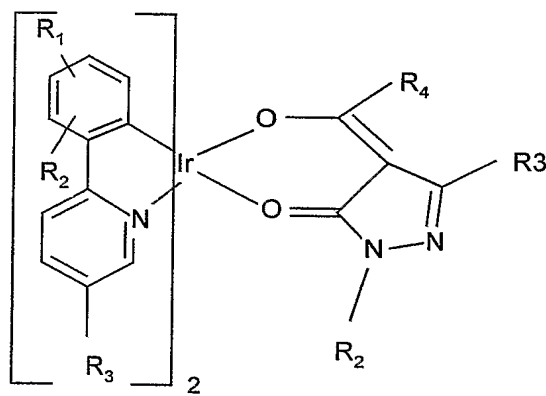

5

(IV)

(V)


preferably R_2 is a phenyl or substituted phenyl group.

10 The invention also provides an electroluminescent device which comprises (i) a first electrode (ii) a layer of an electroluminescent material of formula (I) or (II) above and (iii) a second electrode.

15 The first electrode can function as the anode and the second electrode can function as the cathode and preferably there is a layer of a hole transporting material between the anode and the layer of the electroluminescent compound.


The hole transporting material can be any of the hole transporting materials used in electroluminescent devices.

The hole transporting material can be an amine complex such as poly (vinylcarbazole), N, N'-diphenyl-N, N'-bis (3-methylphenyl) -1,1' -biphenyl -4,4'-diamine (TPD), an unsubstituted or substituted polymer of an amino substituted aromatic compound, a polyaniline, substituted polyanilines, polythiophenes, substituted polythiophenes, polysilanes etc. Examples of polyanilines are polymers of



(VI)


where R is in the ortho - or meta-position and is hydrogen, C1-18 alkyl, C1-6 alkoxy, amino, chloro, bromo, hydroxy or the group



where R is alkyl or aryl and R' is hydrogen, C1-6 alkyl or aryl with at least one other monomer of formula I above.

15

Or the hole transporting material can be a polyaniline; polyanilines which can be used in the present invention have the general formula

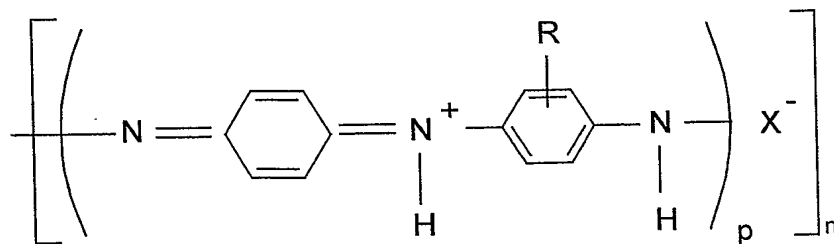

(VII)

where p is from 1 to 10 and n is from 1 to 20, R is as defined above and X is an anion, preferably selected from Cl, Br, SO₄, BF₄, PF₆, H₂PO₃, H₂PO₄,

arylsulphonate, arenedicarboxylate, polystyrenesulphonate, polyacrylate alkylsulphonate, vinylsulphonate, vinylbenzene sulphonate, cellulose sulphonate, camphor sulphonates, cellulose sulphate or a perfluorinated polyanion.

- 5 Examples of arylsulphonates are p-toluenesulphonate, benzenesulphonate, 9,10-anthraquinone-sulphonate and anthracenesulphonate; an example of an arenedicarboxylate is phthalate and an example of arenecarboxylate is benzoate.

- 10 We have found that protonated polymers of the unsubstituted or substituted polymer of an amino substituted aromatic compound such as a polyaniline are difficult to evaporate or cannot be evaporated. However we have surprisingly found that if the unsubstituted or substituted polymer of an amino substituted aromatic compound is deprotonated, then it can be easily evaporated, i.e. the polymer is evaporable.

- 15 Preferably evaporable deprotonated polymers of unsubstituted or substituted polymer of an amino substituted aromatic compound are used. The de-protonated unsubstituted or substituted polymer of an amino substituted aromatic compound can be formed by deprotonating the polymer by treatment with an alkali such as ammonium hydroxide or an alkali metal hydroxide such as sodium hydroxide or
20 potassium hydroxide.


The degree of protonation can be controlled by forming a protonated polyaniline and de-protonating. Methods of preparing polyanilines are described in the article by A. G. MacDiarmid and A. F. Epstein, Faraday Discussions, Chem Soc.88 P319 1989.

25

The conductivity of the polyaniline is dependent on the degree of protonation with the maximum conductivity being when the degree of protonation is between 40 and 60%, for example, about 50%.

Preferably the polymer is substantially fully deprotonated.

A polyaniline can be formed of octamer units. i.e. p is four, e.g.



5

The polyanilines can have conductivities of the order of 1×10^{-1} Siemen cm^{-1} or higher.

10

The aromatic rings can be unsubstituted or substituted, e.g. by a C1 to 20 alkyl group such as ethyl.

15

The polyaniline can be a copolymer of aniline and preferred copolymers are the copolymers of aniline with o-anisidine, m-sulphanilic acid or o-aminophenol, or o-toluidine with o-aminophenol, o-ethylaniline, o-phenylene diamine or with amino anthracenes.

20

Other polymers of an amino substituted aromatic compound which can be used include substituted or unsubstituted polyaminonaphthalenes, polyaminoanthracenes, polyaminophenanthrenes, etc. and polymers of any other condensed polyaromatic compound. Polyaminoanthracenes and methods of making them are disclosed in US Patent 6,153,726. The aromatic rings can be unsubstituted or substituted, e.g. by a group R as defined above.

25

Other hole transporting materials are conjugated polymer and the conjugated polymers which can be used can be any of the conjugated polymers disclosed or referred to in US 5807627, PCT/WO90/13148 and PCT/WO92/03490.

The preferred conjugated polymers are poly (p-phenylenevinylene)-PPV and copolymers including PPV. Other preferred polymers are poly(2,5 dialkoxyphenylene

5 vinylene) such as poly (2-methoxy-5-(2-methoxypentyloxy-1,4-phenylene vinylene), poly(2-methoxypentyloxy)-1,4-phenylenevinylene), poly(2-methoxy-5-(2-dodecyloxy-1,4-phenylenevinylene) and other poly(2,5 dialkoxyphenylenevinylenes) with at least one of the alkoxy groups being a long chain solubilising alkoxy group, poly fluorenes and oligofluorenes, polyphenylenes and oligophenylenes, polyanthracenes and oligo anthracenes, ploythiophenes and oligothiophenes.

10 In PPV the phenylene ring may optionally carry one or more substituents, e.g. each independently selected from alkyl, preferably methyl, alkoxy, preferably methoxy or ethoxy.

15 Any poly(arylenevinylene) including substituted derivatives thereof can be used and the phenylene ring in poly(p-phenylenevinylene) may be replaced by a fused ring system such as anthracene or naphthlyene ring and the number of vinylene groups in each polyphenylenevinylene moiety can be increased, e.g. up to 7 or higher.

The conjugated polymers can be made by the methods disclosed in US 5807627, PCT/WO90/13148 and PCT/WO92/03490.

20 The thickness of the hole transporting layer is preferably 20nm to 200nm.

The polymers of an amino substituted aromatic compound such as polyanilines referred to above can also be used as buffer layers with or in conjunction with other hole transporting materials.

25 The structural formulae of some other hole transporting materials are shown in Figures 4, 5, 6, 7 and 8 of the drawings, where R_1 , R_2 and R_3 can be the same or different and are selected from hydrogen, and substituted and unsubstituted hydrocarbyl groups such as substituted and unsubstituted aliphatic groups, substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorocarbons

30

such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups; R_1 , R_2 and R_3 can also form substituted and unsubstituted fused aromatic, heterocyclic and polycyclic ring structures and can be copolymerisable with a monomer, e.g. styrene. X is Se, S or O, Y can be hydrogen, substituted or unsubstituted hydrocarbyl groups, such as substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorine, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups or nitrile.

Examples of R_1 and/or R_2 and/or R_3 include aliphatic, aromatic and heterocyclic alkoxy, aryloxy and carboxy groups, substituted and unsubstituted phenyl, fluorophenyl, biphenyl, phenanthrene, anthracene, naphthyl and fluorene groups alkyl groups such as t-butyl, heterocyclic groups such as carbazole.


Optionally there is a layer of an electron injecting material between the anode and the electroluminescent material layer. The electron injecting material is a material which will transport electrons when an electric current is passed through electron injecting materials include a metal complex such as a metal quinolate, e.g. an aluminium quinolate, lithium quinolate, zirconium quinolate, a cyano anthracene such as 9,10 dicyano anthracene, cyano substituted aromatic compounds, tetracyanoquinodimethane a polystyrene sulphonate or a compound with the structural formulae shown in figures 2 or 3 of the drawings in which the phenyl rings can be substituted with substituents R as defined above.

The first electrode is preferably a transparent substrate such as a conductive glass or plastic material which acts as the anode; preferred substrates are conductive glasses such as indium tin oxide coated glass, but any glass which is conductive or has a conductive layer such as a metal or conductive polymer can be used. Conductive polymers and conductive polymer coated glass or plastics materials can also be used as the substrate.


The cathode is preferably a low work function metal, e.g. aluminium, calcium, lithium, silver/magnesium alloys, rare earth metal alloys etc; aluminium is a preferred metal. A metal fluoride such as an alkali metal, rare earth metal or their alloys can be used as the second electrode, for example by having a metal fluoride layer formed on a metal.

The invention is illustrated in the Examples.

10 Summary of bis(phenylpyridine)(pyrazolone) iridium complexes:

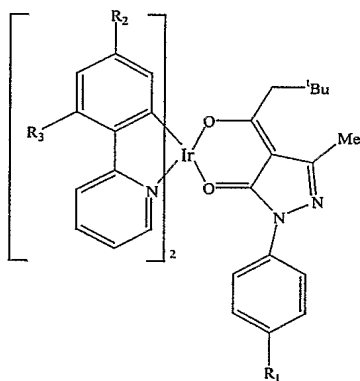

Compound A - D

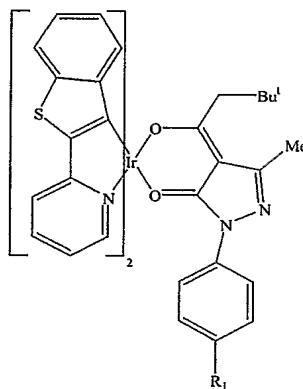

Compound E


15

20

- 11 -

Cpd	R ₁	R ₂	R ₃	m.p./°C	PL _{em} peak/ nm	Elemental analysis (CHN observed, found)		
A	H	H	H	271-275 (110 - T _g)	526 (solid state)	59.05	4.57	7.25
						58.81	4.55	7.15
B	H	F	H	250	522 (solid state) 493 (DCM)	56.49	4.12	6.93
						57.49	4.51	6.47
C	H	F	F	282-284	500 (solid state) 483 (DCM)	54.81	3.70	6.64
						54.71	3.61	6.49
D	F	F	F	277-280	508 (solid state) 484 (DCM)	52.96	3.51	6.50
						52.99	3.48	6.35
E	H	Compound E		Not observed	615 (DCM)	61.16	4.55	6.48
						61.00	4.43	6.30

Tetrakis(2-phenylpyridine- C^2 , N')(μ -chloro) diiridium (Watts et al., J. Am. Chem. Soc., 1985, 107, 1431.)

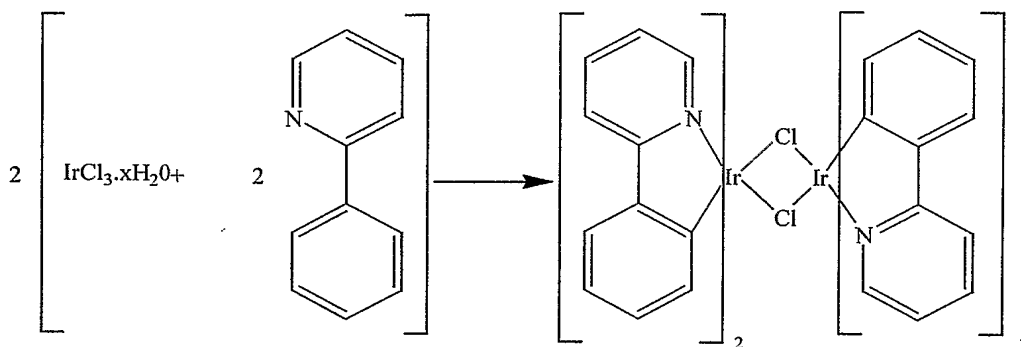


5

Iridium trichloride hydrate (0.39g, 1.3mmol) was combined with 2-phenylpyridine (0.76g, 4.9mmol), dissolved in a mixture of 2-ethoxyethanol (30mL, dried and distilled over $MgSO_4$, degassed) and water (10mL, degassed), and refluxed for 24 hours. The solution was cooled to room temperature and the yellow/green precipitate collected on a glass sinter. The precipitate was washed with ethanol (60mL, 95%), acetone (60mL), and then dissolved in dichloromethane (75mL) and filtered. Toluene (25mL) and hexane (10mL) were added to the filtrate and the volume reduced *in vacuo* to about 50mL. Cooling yielded crystals (yellow/green) of the desired product (0.43g, 62%). This was used without further purification.

15


(A) Bis(2-phenylpyridine- C^2 , N')(4-*tert*-butylacetyl-3-methyl-1-phenyl-pyrazol-5-onato) iridium

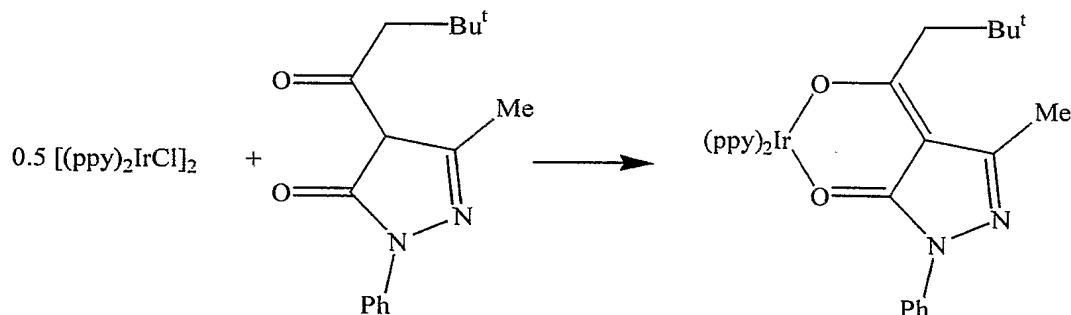

Tetrakis(2-phenylpyridine- C^2 , N')(μ -chloro) diiridium (2.5g, 2.35mmol), 4-*tert*-butylacetyl-3-methyl-1-phenyl-pyrazol-5-one (2.72g, 10mmol) and sodium carbonate (dried at 100°C, 2.5g, 23.6mmol) were refluxed under an inert atmosphere (nitrogen) in 2-ethoxyethanol (dried and distilled over magnesium sulfate, 200mL) for 16 hours.

- 5 On cooling to room temperature, a yellow solution with a small amount of residue was observed. The solvent was reduced to approx. 5-10mL under reduced pressure (10^{-1} Torr) and elevated temperature (60°C). Water (100mL) was slowly added to the solution and the resulting yellow/orange precipitate (some darkly coloured impurities may also remain) filtered onto a glass frit (porosity 2 or 3). This was washed with
- 10 further water and then petroleum spirit (40-60°C). The crude product (after drying to remove water) was first purified by filtration through a short silica-gel pad and washing with dichloromethane (darkly coloured impurities remain on the silica-gel). Two products are identifiable by TLC. These can be separated on a flash silica-gel column using toluene (100mL), then dichloromethane (200mL) and finally
- 15 dichloromethane:ethyl acetate (4:1, 200mL) as eluents. Yield: 2.0g (55%). The product may be further purified by sublimation (220°C, 2×10^{-7} Torr). M.p. 271-5°C.


Tetrakis[2-(4-fluorophenyl)pyridine- C^2 , N'](μ -chloro) diiridium

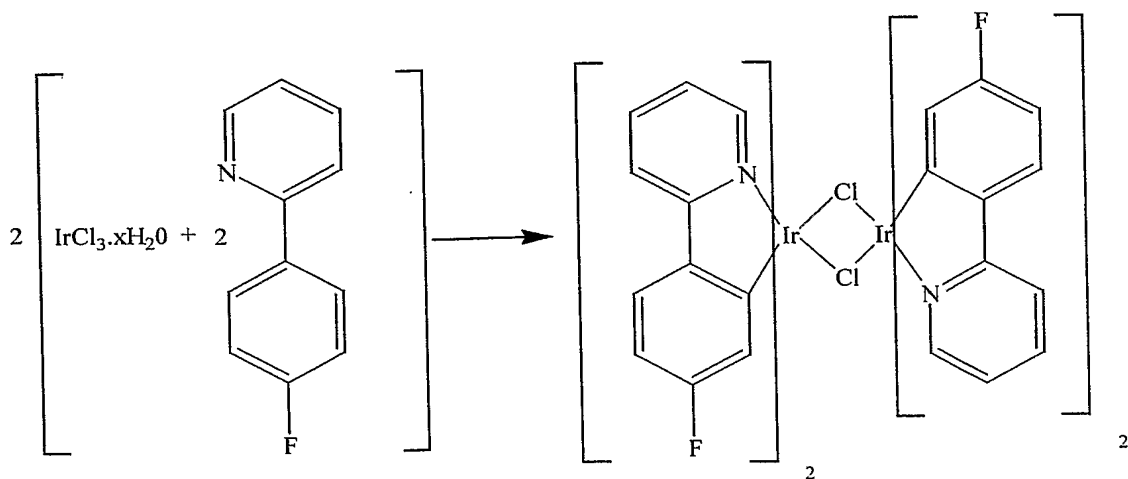

- 14 -

Iridium trichloride hydrate (1.64g, 5.5mmol) was combined with 2-(4-fluorophenyl) pyridine (2.84g, 16.4mmol), dissolved in a mixture of 2-ethoxyethanol (60mL, dried and distilled over MgSO_4 , degassed) and water (20mL, degassed), and refluxed for 24 hours. The solution was cooled to room temperature and the yellow/green precipitate collected on a glass sinter. The precipitate was washed with ethanol (60mL, 95%), acetone (60mL), and hexane. This was dried and used without further purification. Yield (1.6g, 51%)

(B) Bis[2-(4'-fluorophenyl)pyridine- C^2 , N'] (4-*tert*-butylacetyl-3-methyl-1-phenyl-pyrazol-5-onato) iridium

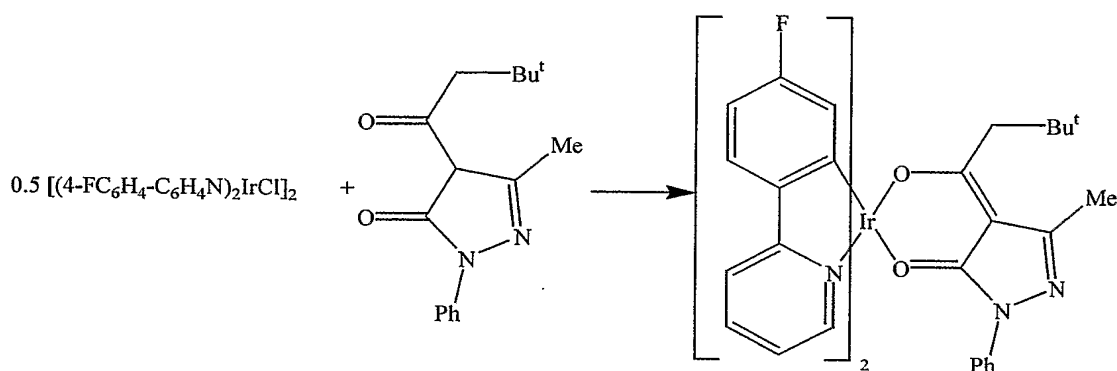


Tetrakis[2-(4'-fluorophenyl)pyridine- C^2 , N'](μ -chloro) diiridium (0.75g, 0.66mmol), 4-*tert*-butylcetyl-3-methyl-1-phenyl-pyrazol-5-one (0.7g, 2.62mmol) and sodium carbonate (dried at 100°C, 0.7g, 6.6mmol) were refluxed under an inert atmosphere in 2-ethoxyethanol (dried and distilled over magnesium sulfate, 40mL) for 16 hours. On cooling to room temperature, a yellow solution with a small amount of residue was observed. The solution was filtered, washed with a little ethanol and the solvent was removed under reduced pressure (10^{-1} Torr) and elevated temperature (60°C). The crude product was dissolved in dichloromethane and initially purified by filtration through a short silica-gel pad and washing with dichloromethane (darkly coloured impurities remain on the silica-gel). Final purification is performed by flash column

chromatography [dichloromethane:petroleum ether 60-80 (2:1 then 4:1)], discarding the first fraction and keeping the second, highly-luminescent fraction. M.p. 250°C.

Tetrakis[2-(2',4'-difluorophenyl)pyridine-C², N'](μ -chloro) diiridium

5

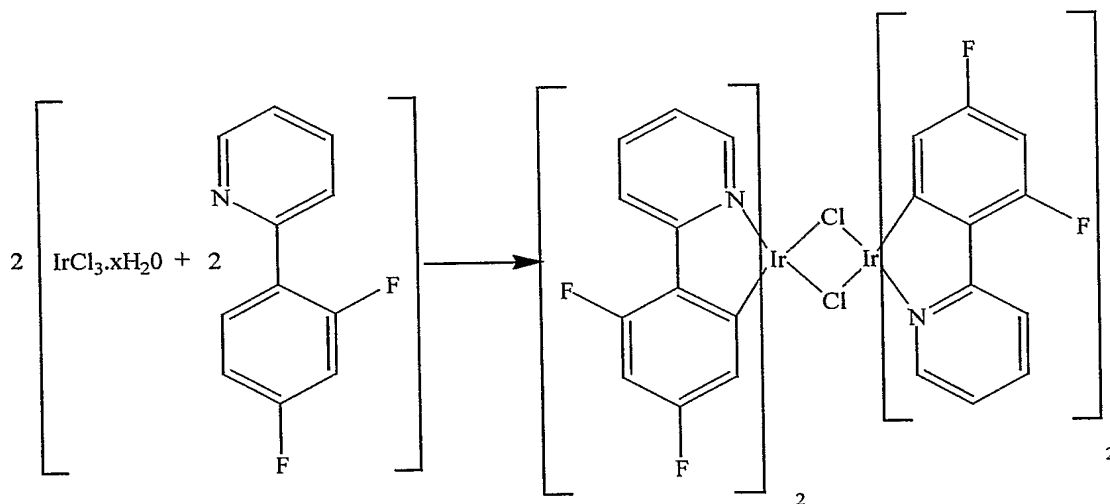


10 Iridium trichloride hydrate (2.81g, 9.42mmol) was combined with 2-(2',4'-difluorophenyl) pyridine (5.4g, 28.3mmol), dissolved in a mixture of 2-ethoxyethanol (70mL, dried and distilled over MgSO₄, degassed) and water (20mL, degassed), and refluxed for 24 hours. The solution was cooled to room temperature and the yellow/green precipitate collected on a glass sinter. The precipitate was washed with ethanol (60mL, 95%), acetone (60mL), and hexane. This was dried and used without further purification. Yield (3.5g, 61%).

15

20

(C) Bis[2-(2',4'-difluorophenyl)pyridine-C², N'] (4-*tert*-butylacetyl-3-methyl-1-phenyl-pyrazol-5-onato) iridium

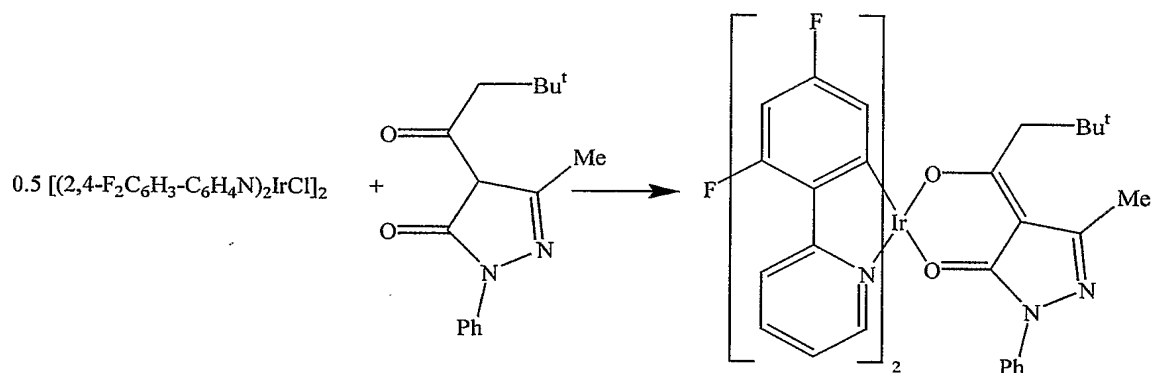


5

Tetrakis[2-(2',4'-difluorophenyl)pyridine-C², N'](μ -chloro) diiridium (1.0g, 0.82mmol), 4-*tert*-butylacetyl-3-methyl-1-phenyl-pyrazol-5-one (0.571g, 2.1mmol) and sodium carbonate (dried at 100°C, 0.63g, 5mmol) were refluxed under an inert atmosphere in 2-ethoxyethanol (dried and distilled over magnesium sulfate, 40mL) for 16 hours. On cooling to room temperature, a yellow solution with a small amount of residue was observed. The solution was filtered, washed with a little ethanol and the solvent was removed under reduced pressure (10⁻¹ Torr) and elevated temperature (60°C). The crude product was dissolved in dichloromethane and initially purified by filtration through a short silica-gel pad and washing with dichloromethane (darkly coloured impurities remain on the silica-gel). Final purification was performed by flash column chromatography [chloroform:hexane (2:1, then 4:1)], discarding the first fraction and keeping the second, highly-luminescent fraction. Yield: 1.0g (72%). M.p. 282°C.

20

(D) Bis[2-(2',4'-difluorophenyl)pyridine-C², N'] [4-*tert*-butylacetyl-3-methyl-1-(4-fluorophenyl)-pyrazol-5-onato] iridium

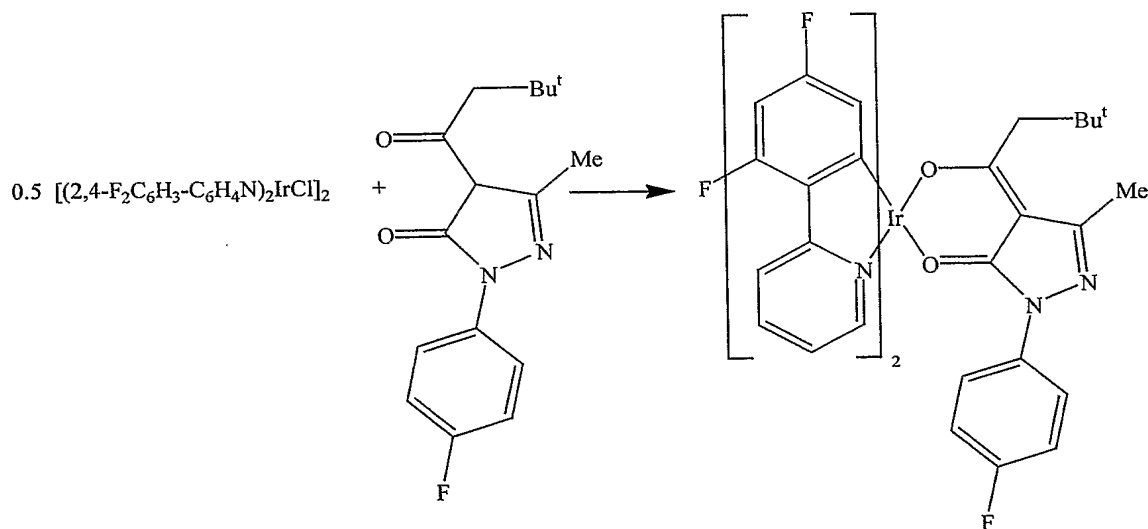


5

Tetrakis[2-(2',4'-difluorophenyl)pyridine-C², N'](μ -chloro) diiridium (1.0g, 0.82mmol), 4-*tert*-butylacetyl-3-methyl-1-(4'-fluorophenyl)-pyrazol-5-one (0.64g, 2.2mmol) and sodium carbonate (dried at 100°C, 0.63g, 5mmol) were refluxed under an inert atmosphere in 2-ethoxyethanol (dried and distilled over magnesium sulfate, 60mL) for 16 hours. On cooling to room temperature, a yellow solution with a small amount of residue was observed. The solution was filtered, washed with a little ethanol and the solvent was removed under reduced pressure (10⁻¹ Torr) and elevated temperature (60°C). The crude product was dissolved in dichloromethane and initially purified by filtration through a short silica-gel pad and washing with dichloromethane (darkly coloured impurities remain on the silica-gel). Final purification was performed by flash column chromatography [chloroform:hexane (2:1, then 4:1)], discarding the first fraction and keeping the second, highly-luminescent fraction. Yield: 1.0g (72%). M.p. 277°C.

20

Tetrakis[2-benzo[b]thiophen-2-yl-pyridine-C², N'](μ -chloro) diiridium

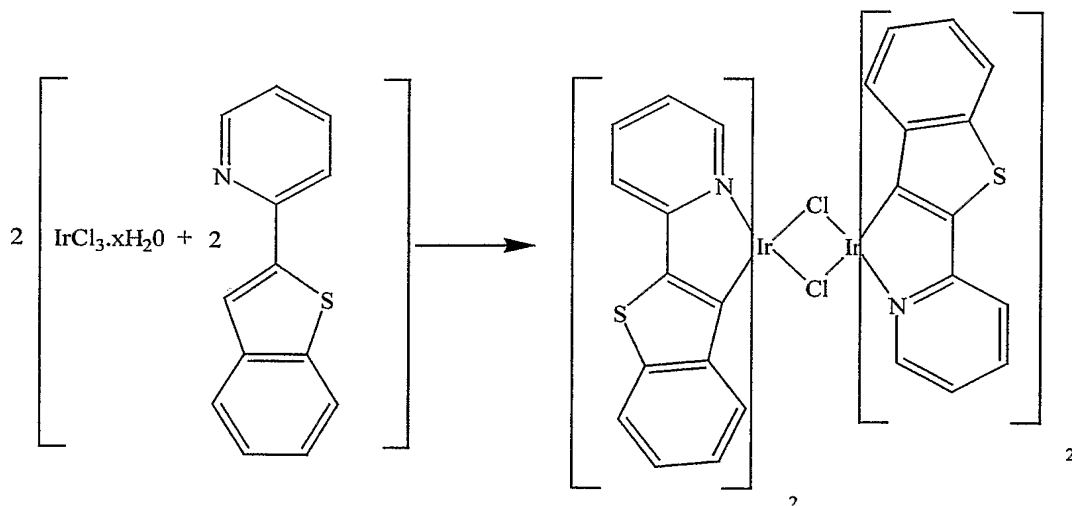


- 5 Iridium trichloride hydrate (0.97g, 3.24mmol) was combined with 2-benzo[b]thiophen-2-yl-pyridine (2.05g, 9.7mmol), dissolved in a mixture of 2-ethoxyethanol (70mL, dried and distilled over MgSO_4 , degassed) and water (20mL, degassed), and refluxed for 24 hours. The solution was cooled to room temperature and the yellow/green precipitate collected on a glass sinter. The precipitate was
- 10 washed with ethanol (60mL, 95%), acetone (60mL), and hexane. This was dried and used without further purification. Yield (1.5g, 71%)

15


20

(E) Bis[2-benzo[b]thiophen-2-yl-pyridine-C², N'] (4-*tert*-butylacetyl-3-methyl-1-phenyl-pyrazol-5-onato) iridium

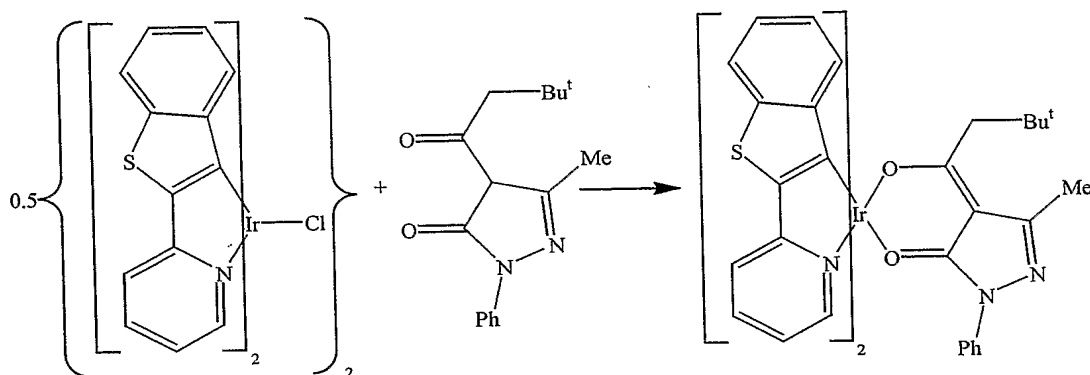


- 5 Tetrakis[2-benzo[b]thiophen-2-yl-pyridine-C², N'](μ -chloro) diiridium (1.0g, 0.77mmol), 4-*tert*-butylacetyl-3-methyl-1-phenyl-pyrazol-5-one (0.54g, 2mmol) and sodium carbonate (dried at 100°C, 0.63g, 5mmol) were refluxed under an inert atmosphere in 2-ethoxyethanol (dried and distilled over magnesium sulfate, 40mL) for 16 hours. On cooling to room temperature, an orange/red solution with a small amount of residue was observed. The solution was filtered, washed with a little ethanol and the solvent was removed under reduced pressure (10^{-1} Torr) and elevated temperature (60°C). The crude product was dissolved in dichloromethane and initially purified by filtration through a short silica-gel pad and washing with dichloromethane (darkly coloured impurities remain on the silica-gel). Final purification was performed by flash column chromatography [chloroform:hexane (1:1, then 2:1)], discarding the first fraction and keeping the second, highly-luminescent fraction. Yield: 0.8g (59%).
- 10
- 15

Summary of bis(phenylpyridine)(pyrazolyl-pyridine) iridium complexes:




Compound F - H



Compound I

Cpd	R ₁	R ₂	R ₃	m.p./°C	PL _{em} peak/ nm	Elemental analysis (CHN observed, found)		
F	Ph	F	F	Not observed (194 - T _g)	488, 498 (solid state) 470 (DCM)	54.54	2.80	8.83
						54.05	2.73	8.56
G	CN-Ph	F	F	374 (204 - T _g)	502 (solid state) 468 (DCM)	54.34	2.59	10.28
						54.02	2.36	10.19
H	tBu	F	F	266 (166 - T _g)	504 (solid state) 479 (DCM)	52.84	3.39	9.06
						52.58	3.44	8.96
I	(OMe) ₃ - Ph	Compound I		Not observed	597 (DCM)	55.95	3.49	7.59
						54.97	3.38	7.32

Tetrakis[2-(2,4-difluorophenyl)pyridine-C², N'](μ -chloro) diiridium

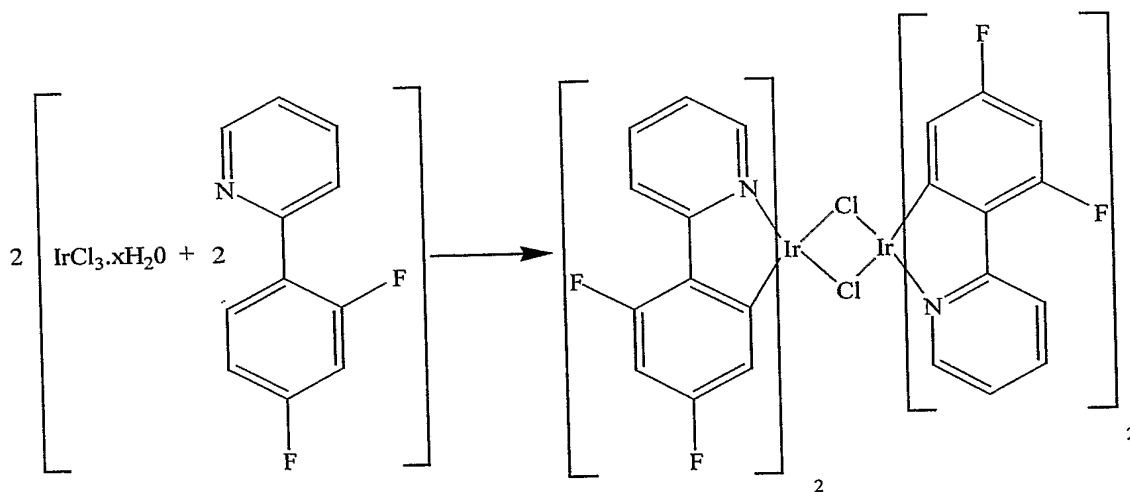


- 5 Iridium trichloride hydrate (2.81g, 9.4mmol) was combined with 2-(2',4'-difluorophenyl)pyridine (5.4g, 28mmol), dissolved in a mixture of 2-ethoxyethanol (70mL, dried and distilled over MgSO₄, degassed) and water (20mL, degassed), and refluxed for 24 hours. The solution was cooled to room temperature and the yellow precipitate collected on a glass sinter. The precipitate was washed with ethanol
- 10 (60mL, 95%), acetone (60mL), and hexane. This was dried and used without further purification. Yield (3.5g, 61%).

15

20

Bis[2-(2',4'-difluorophenyl)pyridine-C², N'] [2-(5-phenyl-2H-pyrazol-3-yl)pyridine] iridium

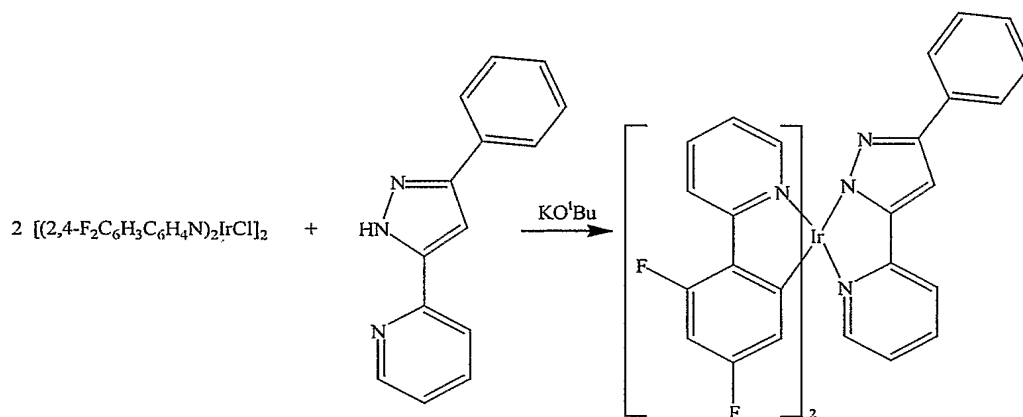

5


Potassium *tert*-butoxide (0.24g, 2.1mmol) and 2-(5-phenyl-2H-pyrazol-3-yl)pyridine (0.47g, 2.1mmol) were added to a 200mL Schlenk tube under an inert atmosphere. 2-Ethoxyethanol (dried and distilled over magnesium sulfate, 40mL) was added and the resultant solution stirred at ambient temperature for 10 minutes. Tetrakis[2-(2',4'-difluorophenyl)-C², N'](μ -chloro) diiridium (1.0g, 0.82mmol) was added and the mixture refluxed under an inert atmosphere for 16 hours. On cooling to room temperature, a yellow solution with a small amount of residue was observed. The solvent was removed under reduced pressure (10^{-1} Torr) and elevated temperature (60°C). Purification was achieved on a flash silica-gel column (chloroform, then chloroform:ethyl acetate 4:1). Yield: 0.9g (69%).

15

T_g 194 °C.

20

Bis[2-(2',4'-difluorophenyl)pyridine-C², N'] {2-[5-(4-benzonitrile) -2H-pyrazol-3-yl]pyridine} iridium

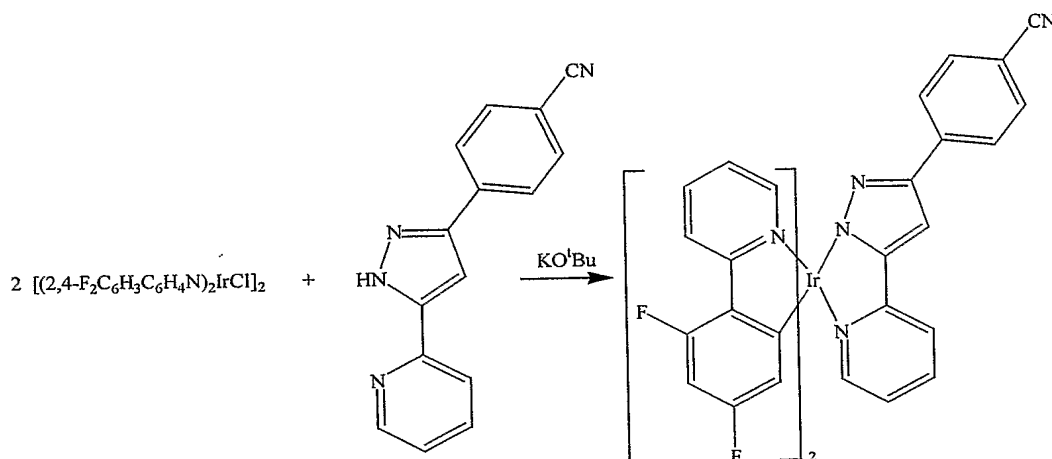

5


Potassium *tert*-butoxide (0.24g, 2.1mmol) and 2-[5-(4'-cyanophenyl) -2H-pyrazol-3-yl]pyridine (0.52g, 2.1mmol) were added to a 200mL Schlenk tube under an inert atmosphere. 2-Ethoxyethanol (dried and distilled over magnesium sulfate, 40mL) was added and the resultant solution stirred at ambient temperature for 10 minutes.

10 Tetrakis[2-(2',4'-difluorophenyl)-C², N'](μ -chloro) diiridium (1.0g, 0.82mmol) was added and the mixture refluxed under an inert atmosphere for 16 hours. On cooling to room temperature, a yellow solution with a small amount of residue was observed. The solvent was removed under reduced pressure (10⁻¹ Torr) and elevated temperature (60°C). Purification was achieved on a flash silica-gel column

15 (chloroform, then chloroform:ethyl acetate 4:1), followed by recrystallisation from methanol. Yield: 1.0g (75%). M.p. 367°C. T_g 208°C.

20

Tetrakis[2-benzo[b]thiophen-2-yl-pyridine-C², N'](μ -chloro) diiridium

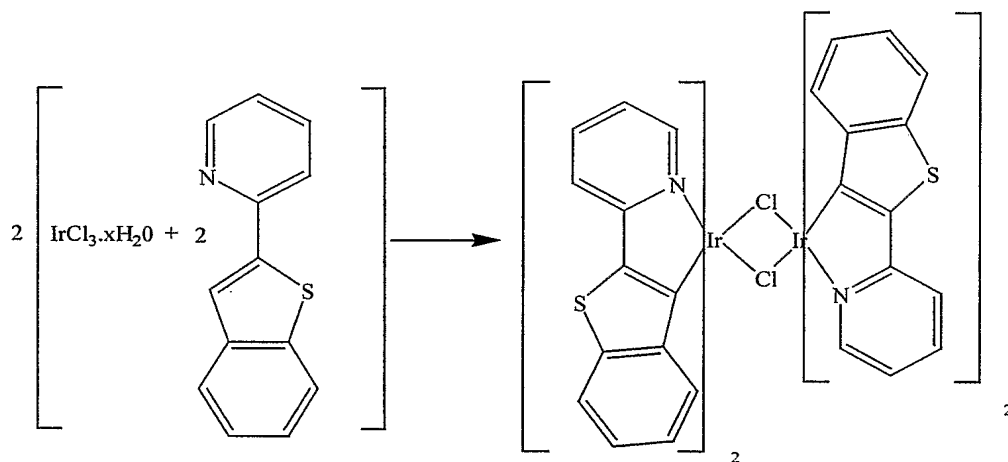


- 5 Iridium trichloride hydrate (0.97g, 3.24mmol) was combined with 2-benzo[b]thiophen-2-yl-pyridine (2.05g, 9.7mmol), dissolved in a mixture of 2-ethoxyethanol (70mL, dried and distilled over MgSO_4 , degassed) and water (20mL, degassed), and refluxed for 24 hours. The solution was cooled to room temperature and the orange precipitate collected on a glass sinter. The precipitate was washed
- 10 with ethanol (60mL, 95%), acetone (60mL), and hexane. This was dried and used without further purification. Yield (1.5g, 71%)

15

20

Bis[2-benzo[b]thiophen-2-yl-pyridine-C², N'] {2-[5-(3',4',5'-trimethoxyphenyl)-2H-pyrazol-3-yl]pyridine} iridium

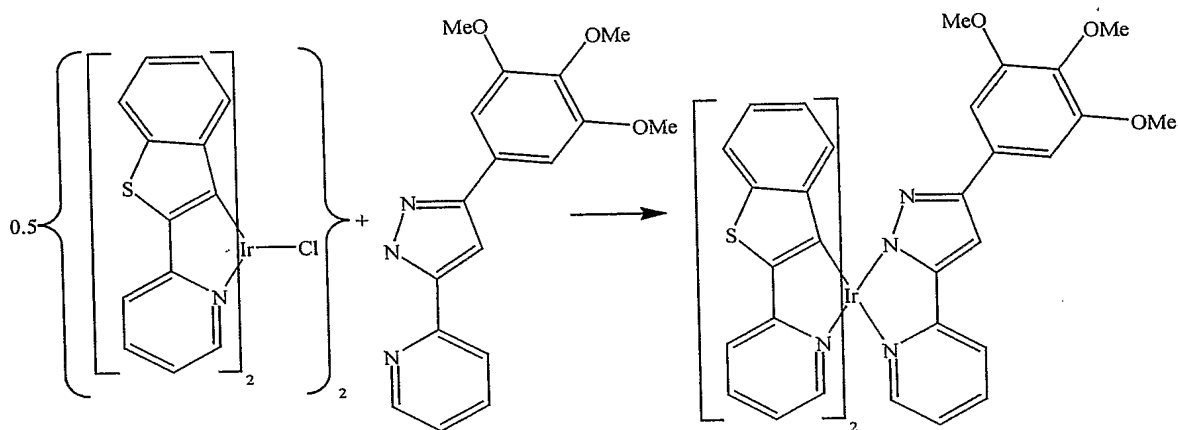

5


Potassium *tert*-butoxide (0.09g, 0.8mmol) and 2-[5-(3',4',5'-trimethoxyphenyl)-2H-pyrazol-3-yl]pyridine (0.25g, 0.8mmol) were added to a 200mL Schlenk tube under an inert atmosphere. 2-Ethoxyethanol (dried and distilled over magnesium sulfate, 30mL) was added and the resultant solution stirred at ambient temperature for 10 minutes. Tetrakis[2-benzo[b]thiophen-2-yl-pyridine-C², N'](μ -chloro) diiridium (0.5g, 0.385mmol) was added and the mixture refluxed under an inert atmosphere for 16 hours. On cooling to room temperature, an orange/red solution with a small amount of residue was observed. The solvent was removed under reduced pressure (10⁻¹ Torr) and elevated temperature (60°C). Purification was achieved on a flash silica-gel column (chloroform), followed by recrystallisation from ethanol. Yield: 0.6g (84%).

15


Electroluminescent Devices

20


In these devices the following compounds were used:-

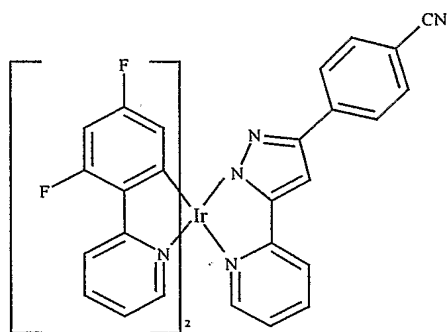


Compound F

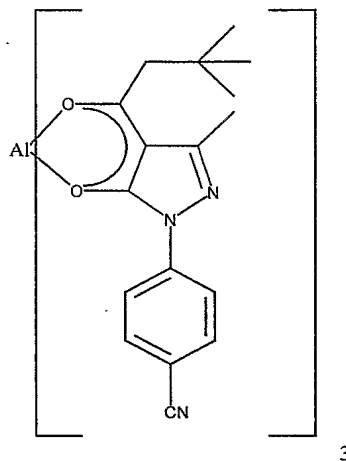


Compound G

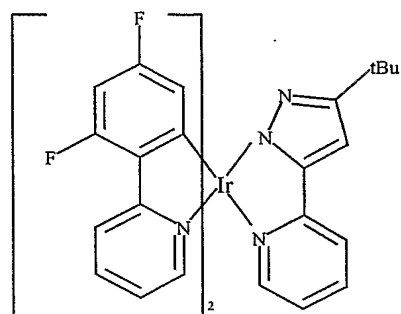


Compound H

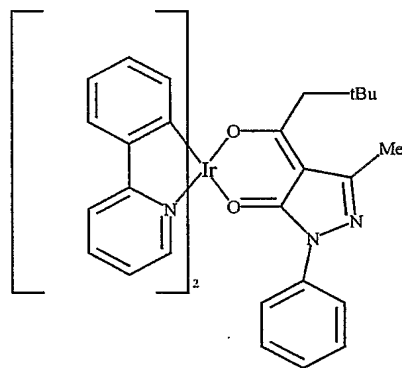

Compound J

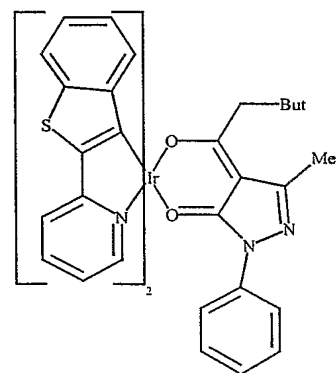

Compound K

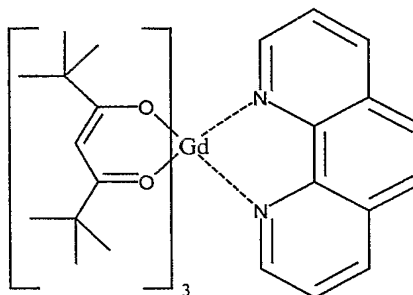

Compound L

Example 1

A pre-etched ITO coated glass piece ($10 \times 10\text{cm}^2$) was used. The device was fabricated by sequentially forming on the ITO, by vacuum evaporation using a Solciet Machine, ULVAC Ltd. Chigacki, Japan the active area of each pixel was 3mm by 3mm, the layers comprised:-

(1)ITO (165 nm)/(2)CuPc (25 nm)/ α -NPB (40 nm)/TCTA : Compound F (38 : 2.1 nm)/Liq (30 nm)/LiF (0.5 nm)/Al

The device structure is shown in fig. 1

Where CuPc is a copper phthalocyanine buffer layer, α -NPB is as in fig. TCTA is 4,4',4''-Tris(carbazole-9-yl)-triphenylamine, Liq is lithium quinolate and LiF is lithium fluoride.

The coated electrodes were stored in a vacuum desiccator over a molecular sieve and phosphorous pentoxide until they were loaded into a vacuum coater (Edwards, 10^{-6} torr) and aluminium top contacts made. The devices were then kept in a vacuum desiccator until the electroluminescence studies were performed.

The ITO electrode was always connected to the positive terminal. The current vs. voltage studies were carried out on a computer controlled Keithly 2400 source meter.

The electroluminescent properties were measured and the results shown in fig. 9.

Example 2

An electroluminescent device was made as in Example 1 with the structure

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/TCTA : Compound F (37 : 3 nm)/Compound G (3 nm)/Zr_q4 (30 nm)/LiF (0.5 nm)/Al

The electroluminescent properties are shown in fig. 10.

Example 3

An electroluminescent device was made as in Example 1 with the structure

ITO (165 nm)/CuPc (25 nm)/ α -NPB (60 nm)/CBP : Compound J (20 : 1.3 nm)/BCP (6 nm)/Alq₃ (40 nm)/LiF (0.2 nm)/Al

5 The electroluminescent properties are shown in fig. 11.

Example 4

An electroluminescent device was made as in Example 1 with the structure

10 ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/CBP : Compound J (20 : 0.6 nm)/BCP (6 nm)/Liq (40 nm)/LiF (0.5 nm)/Al

The electroluminescent properties are shown in fig. 12.

Example 5

An electroluminescent device was made as in Example 1 with the structure

15 ITO (165 nm)/ α -NPB (40 nm)/CBP : Compound J (20 : 7 nm)/BCP (10 nm)/Zr_q₄ (50 nm)/LiF (0.5 nm)/Al

where BCP is bathocupron

The electroluminescent properties are shown in fig. 13.

20 Example 6

An electroluminescent device was made as in Example 1 with the structure

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/TCTA : Compound H (40 : 0.8 nm)/Liq (30 nm)/LiF (0.5 nm)/Al

The electroluminescent properties are shown in fig. 14.

Example 7

An electroluminescent device was made as in Example 1 with the structure

ITO (165 nm)/ α -NPB (40 nm)/CBP : Compound J (20 : 8.3 nm)/

Compound L (10 nm)/Zr_q₄ (50 nm)/LiF (0.5 nm)/Al

- 5 The electroluminescent properties are shown in fig. 15.

Example 8

An electroluminescent device was made as in Example 1 with the structure

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/CBP : Compound K (35 : 5 nm/Zr_q₄

- 10 (30 nm)/LiF (0.5 nm)/Al

The electroluminescent properties are shown in fig. 16.

Example 9


An electroluminescent device was made as in Example 1 with the structure

- 15 ITO (165 nm)/CuPc (50 nm)/ α -NPB (40 nm)/CBP : Compound J (20 : 6.1 nm)/Compound F (10 nm)/Zr_q₄ (50 nm)/LiF (0.5 nm)/Al

The electroluminescent properties are shown in fig. 17.

Claims

1. Electroluminescent compounds of formula

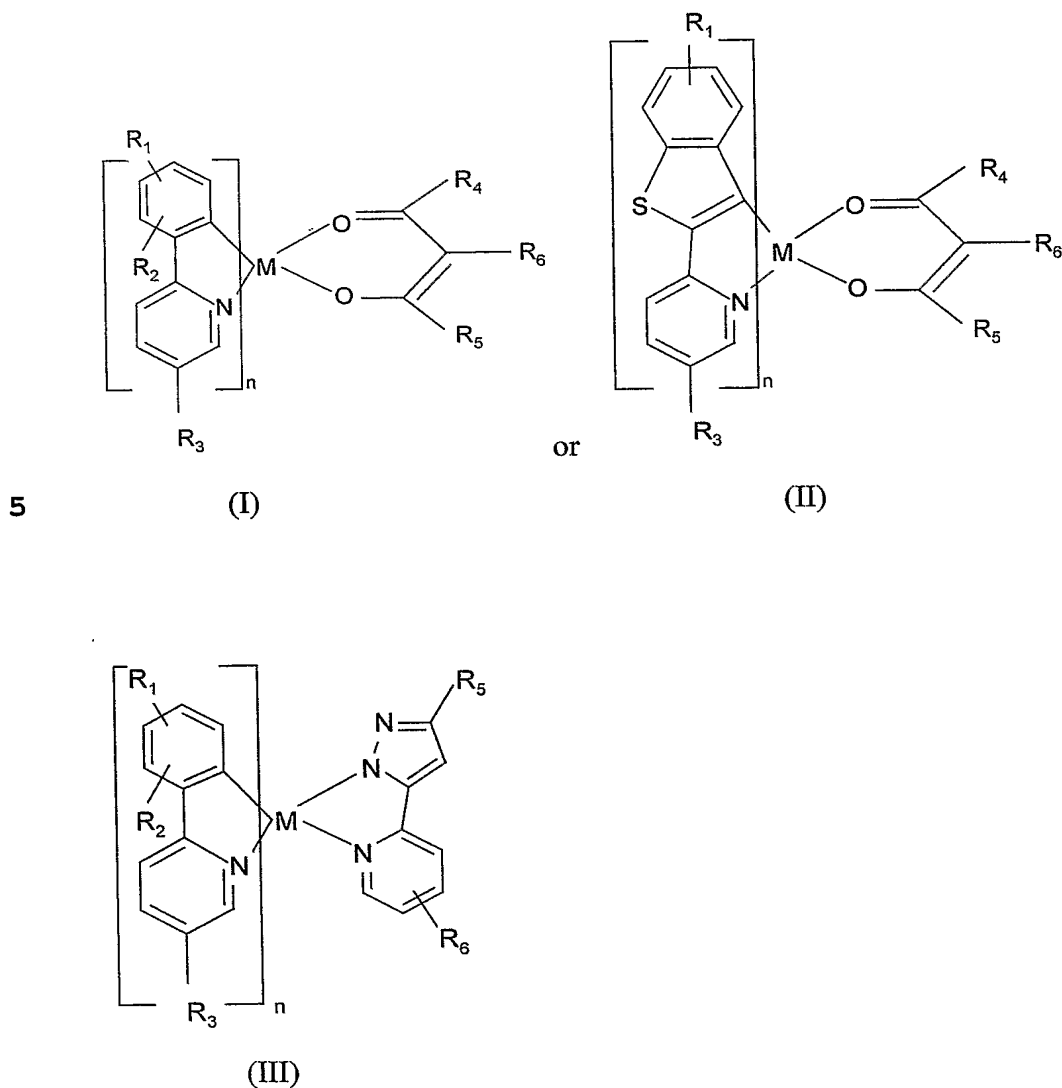


10


where R_1 , R_2 , R_3 , R_4 , R_5 and R_6 can be the same or different and are selected from hydrogen, and substituted and unsubstituted hydrocarbyl groups such as substituted and unsubstituted aliphatic groups, substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups; R_1 , R_2 and R_3 can also form

15

- substituted and unsubstituted fused aromatic, heterocyclic and polycyclic ring structures and can be copolymerisable with a monomer, e.g. styrene, and where R_4 and R_5 can be the same or different and are selected from hydrogen, and substituted and unsubstituted hydrocarbyl groups such as substituted and unsubstituted aliphatic groups, substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups; R_1 , R_2 and R_3 can also form substituted and unsubstituted fused aromatic, heterocyclic and polycyclic ring structures and can be copolymerisable with a monomer, M is ruthenium, rhodium, palladium, osmium, iridium or platinum and $n+2$ is the valency of M .
2. An electroluminescent as claimed in claim 1 in which M is iridium and n is 2.
3. An electroluminescent as claimed in claim 1 or 2 in which R_1 and/or R_2 and/or R_3 and/or R_4 and/or R_5 and/or R_6 include aliphatic, aromatic and heterocyclic alkoxy, aryloxy and carboxy groups, substituted and unsubstituted phenyl, fluorophenyl, biphenyl, phenanthrene, anthracene, naphthyl and fluorene groups alkyl groups such as *t*-butyl, heterocyclic groups such as carbazole.
4. An electroluminescent as claimed in claim 1, 2 or 3 in which the compounds (I) are those in which R_5 and R_6 form a




5. An electroluminescent as claimed in claim 4 which has the formula

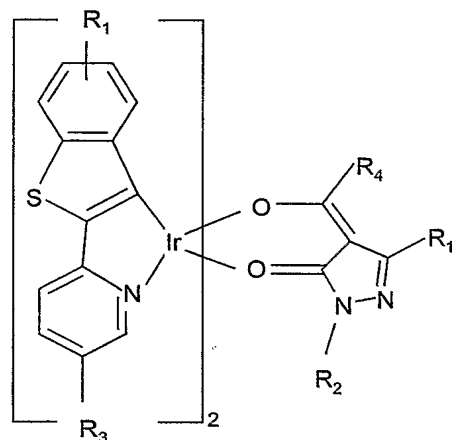

(IV)

and

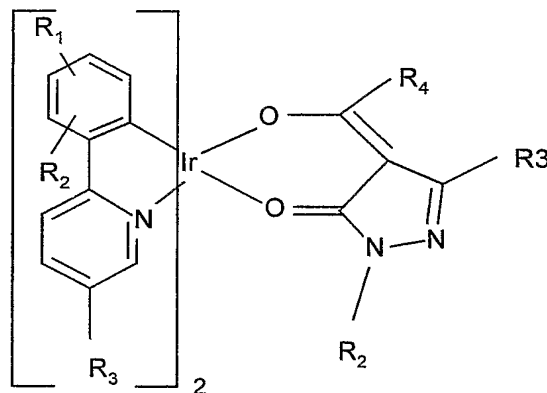

(V)

5 6. An electroluminescent as claimed in claim 5 in which R₂ is a phenyl or substituted phenyl group.

7. An electroluminescent device which comprises (i) a first electrode (ii) a layer of an electroluminescent material of formula as claimed in any one of claims 1 to 6 and (iii)
10 a second electrode.

8. An electroluminescent device as claimed in claim 8 in which there is a layer of a hole transmitting material between the first electrode and the electroluminescent layer.

15

9. An electroluminescent device as claimed in claim 9 in which the hole transmitting material is an aromatic amine complex.

10. An electroluminescent device as claimed in claim 9 in which the hole
20 transmitting material is a polyaromatic amine complex.

11. An electroluminescent device as claimed in claim 9 in which the hole transmitting material is a film of a polymer selected from poly(vinylcarbazole), N,N'-diphenyl-N,N'-bis (3-methylphenyl) -1,1' -biphenyl -4,4'-diamine (TPD), polyaniline, substituted polyanilines, polythiophenes, substituted polythiophenes, polysilanes and substituted polysilanes.
12. An electroluminescent device as claimed in claim 9 in which the hole transmitting material is a film of a compound of formula (VII) or (VII) herein or as in figures 4 to 8 of the drawings.
13. An electroluminescent device as claimed in claim 9 in which the hole transmitting material is a copolymer of aniline, a copolymer of aniline with o-anisidine, m-sulphanilic acid or o-aminophenol, or o-toluidine with o-aminophenol, o-ethylaniline, o-phenylene diamine or with an amino anthracene.
14. An electroluminescent device as claimed in claim 9 in which the hole transmitting material is a conjugated polymer.
15. An electroluminescent device as claimed in claim 14 in which the conjugated polymer is selected from poly (p-phenylenevinylene)-PPV and copolymers including PPV, poly(2,5 dialkoxyphenylene vinylene), poly (2-methoxy-5-(2-methoxypentyloxy-1,4-phenylene vinylene), poly(2-methoxypentyloxy)-1,4-phenylenevinylene), poly(2-methoxy-5-(2-dodecyloxy-1,4-phenylenevinylene) and other poly(2,5 dialkoxyphenylenevinylenes) with at least one of the alkoxy groups being a long chain solubilising alkoxy group, poly fluorenes and oligofluorenes, polyphenylenes and oligophenylenes, polyanthracenes and oligo anthracenes, polythiophenes and oligothiophenes.

- 34 -

16. An electroluminescent device as claimed in any one of claims 8 to 15 in which the electroluminescent compound is mixed with the hole transmitting material.

5 17. An electroluminescent device as claimed in any one of claims 7 to 16 in which there is a layer of an electron transmitting material between the cathode and the electroluminescent compound layer.

18. An electroluminescent device as claimed in claim 17 in which the electron transmitting material is a metal quinolate.

10

19. An electroluminescent device as claimed in claim 18 in which the metal quinolate is an aluminium quinolate, zirconium quinolate or lithium quinolate

15 20. An electroluminescent device as claimed in claim 17 in which the electron transmitting material is of formula $Mx(DBM)_n$ where Mx is a metal and DBM is dibenzoyl methane and n is the valency of Mx .

20 21. An electroluminescent device as claimed in claim 17 in which the electron transmitting material is a cyano anthracene such as 9,10 dicyano anthracene, a polystyrene sulphonate or a compound of formulae shown in figure 2 or 3 of the drawings.

22. An electroluminescent device as claimed in any one of claims 17 to 21 in which the electron transmitting material is mixed with the electroluminescent compound.

25

23. An electroluminescent device as claimed in any one of claims 7 to 22 in which the first electrode is a transparent electricity conducting glass electrode.

24. An electroluminescent device as claimed in any one of claims 7 to 23 in which

- 36 -

Abstract

Novel iridium complexes are electroluminescent.

1/26



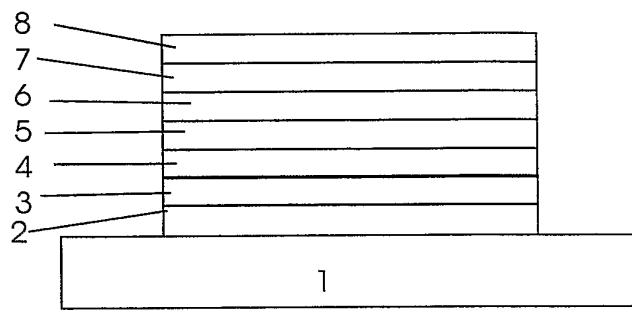


Fig. 1




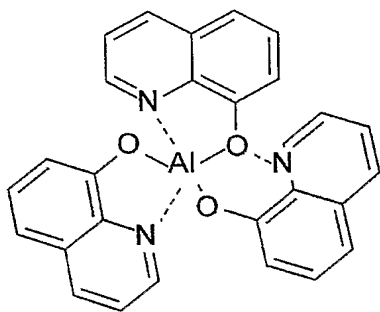


Alq

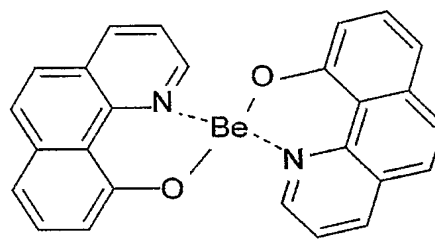


Bebq

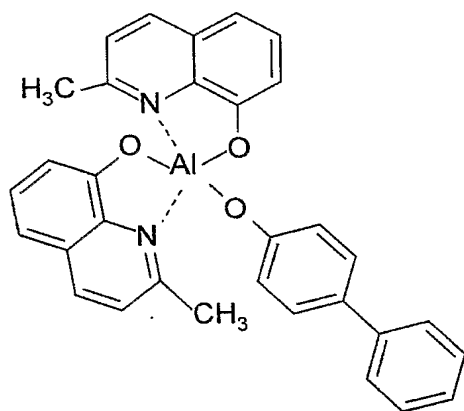


BAlq1

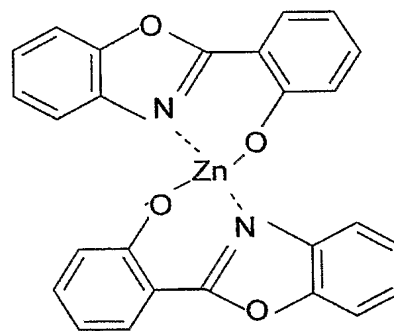

ZnPBO

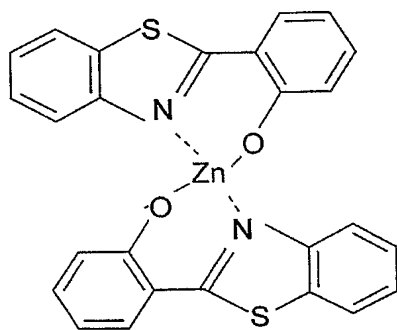


ZnPBT

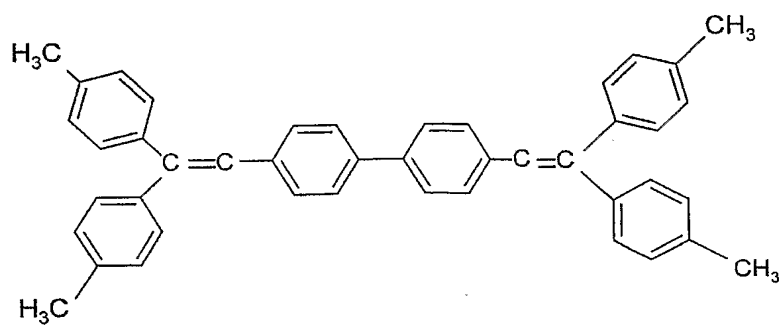


DTVb1

Fig. 2







t-Bu-PBD

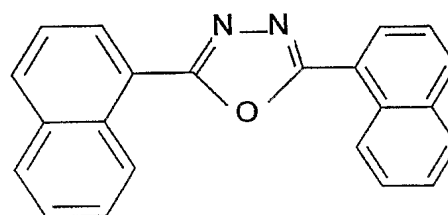


BND

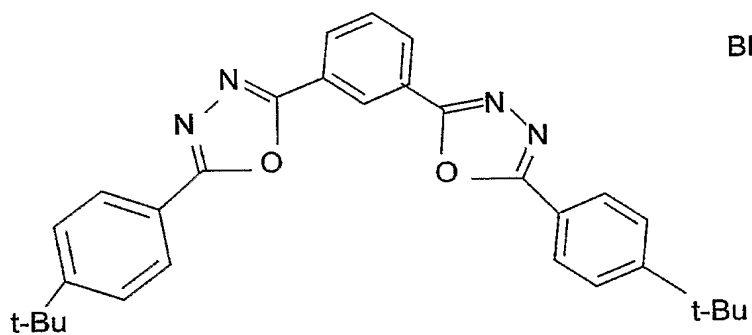

OXD-7

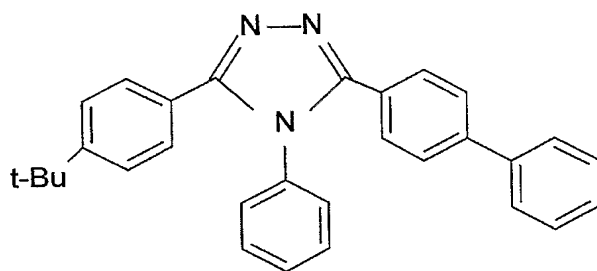

TAZ

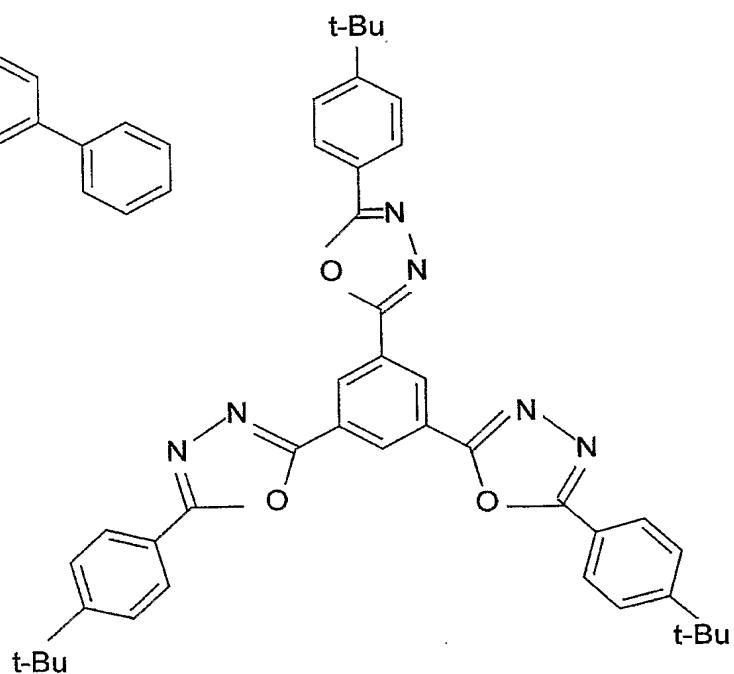

OXD-Star

Fig. 3



4/26

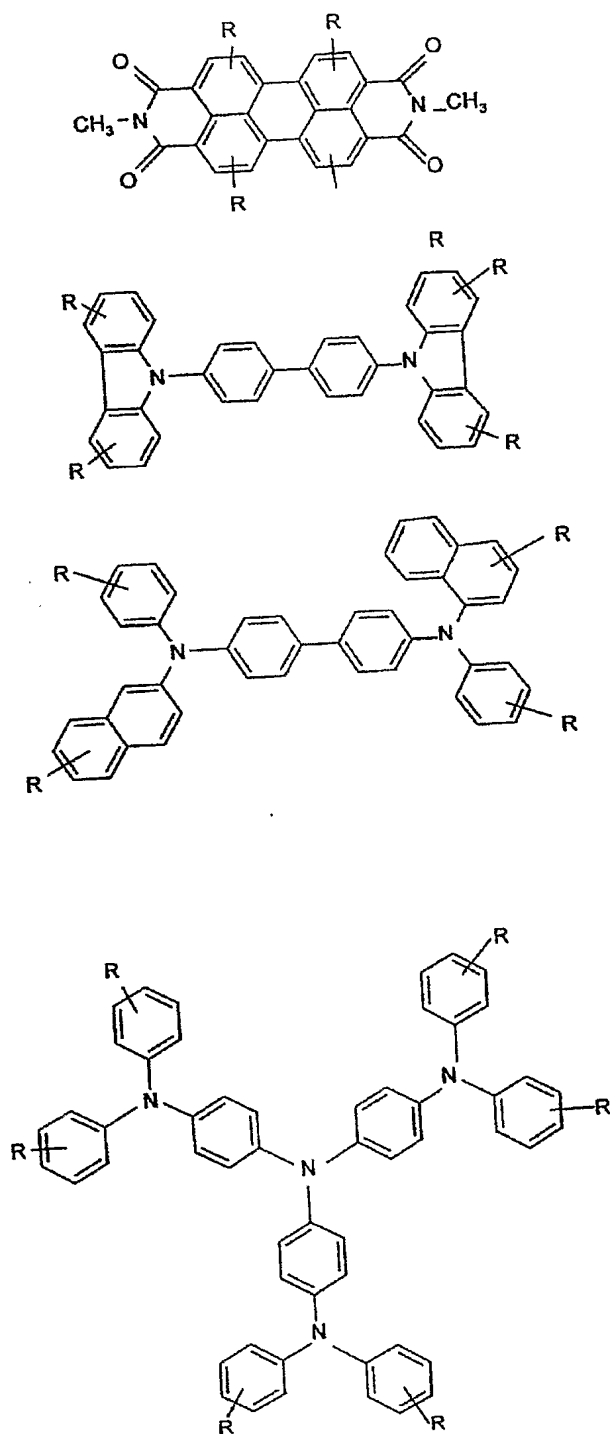


Fig. 4



5/26




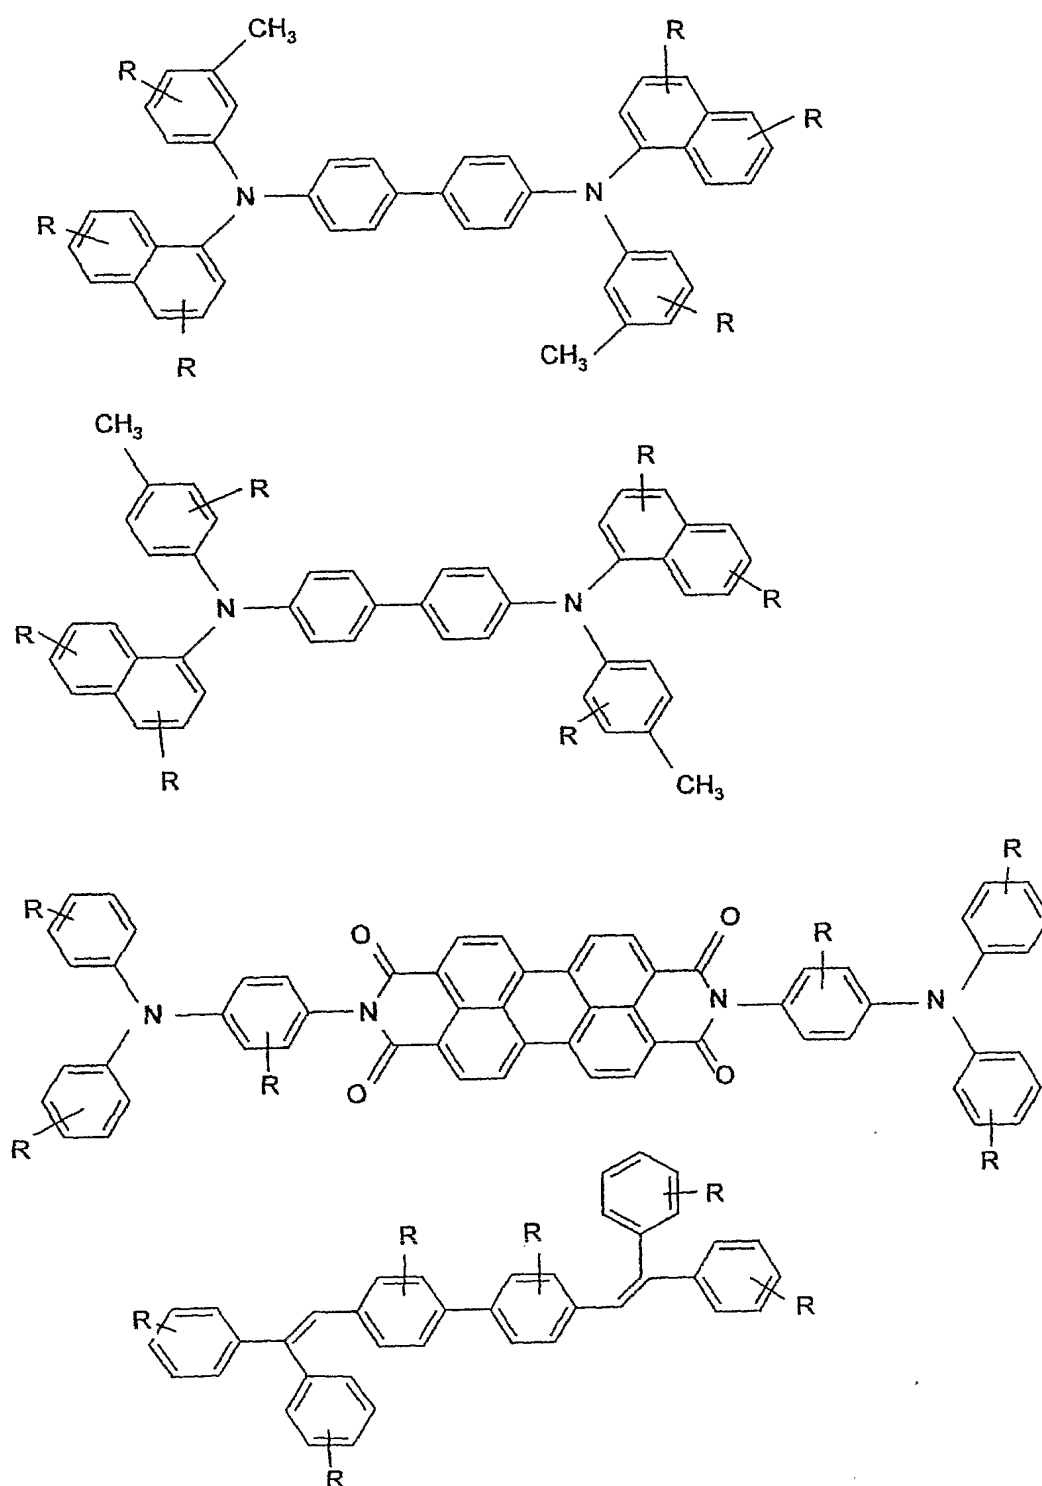


Fig. 5

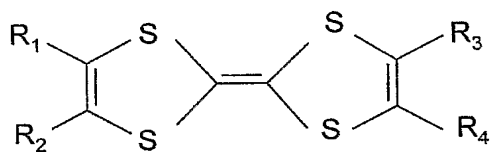

6/26

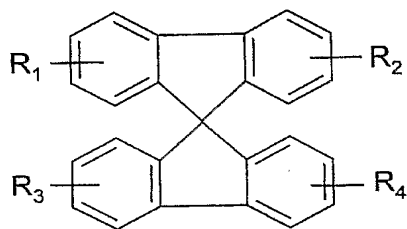

or


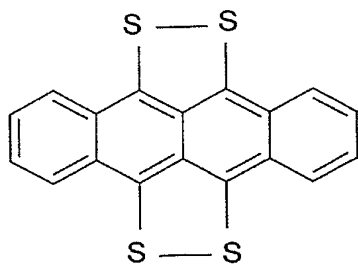


Fig. 6

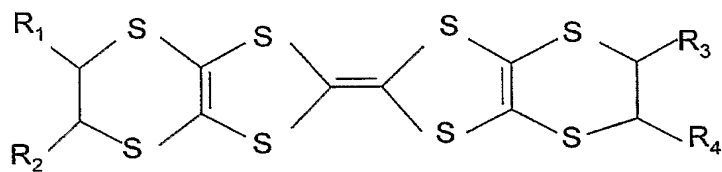

7/26



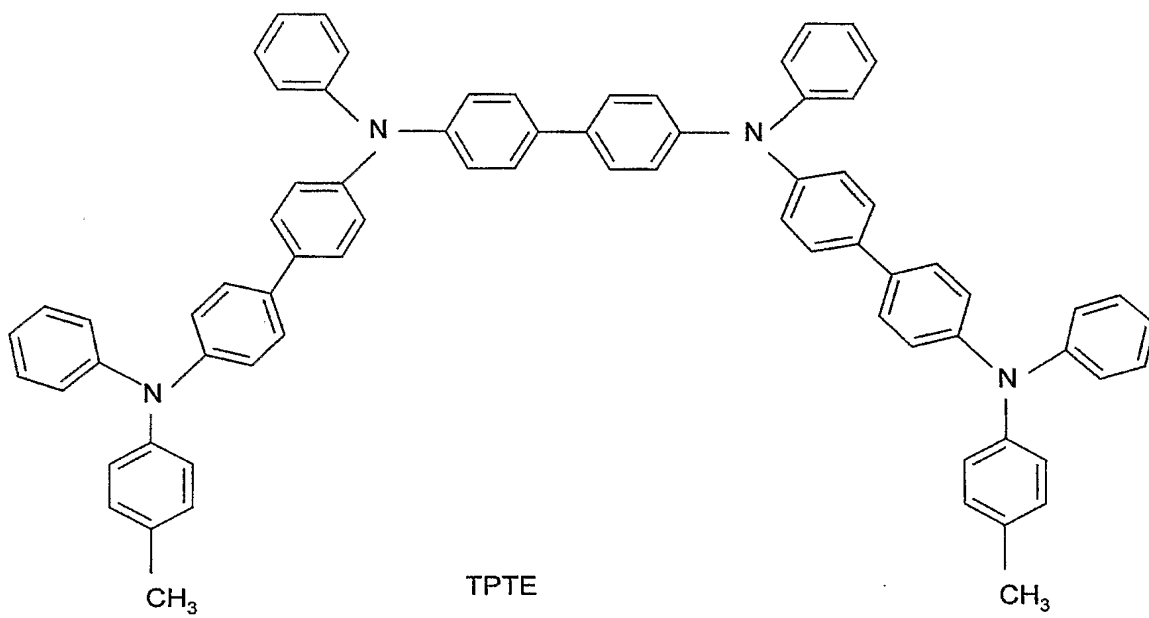



Fig. 7

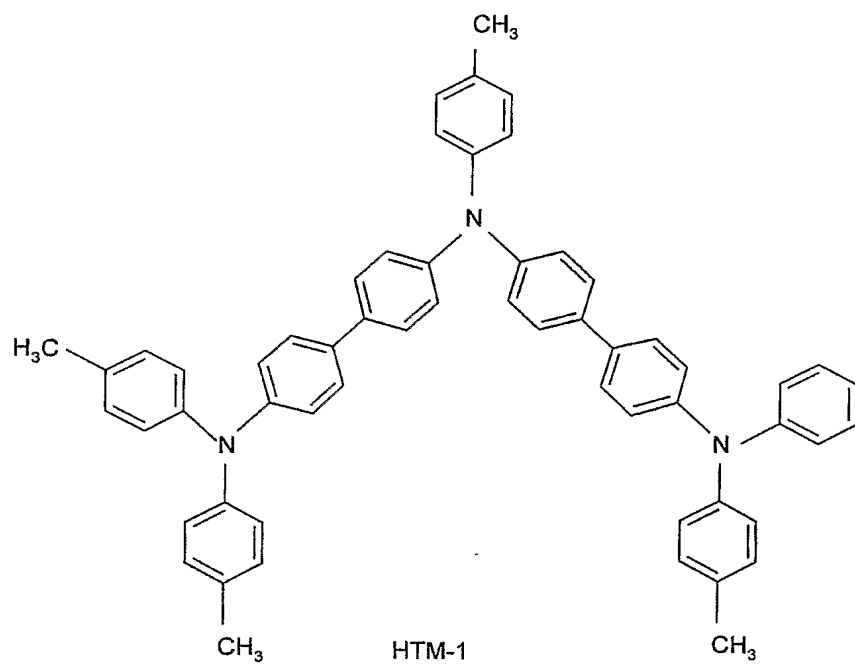


8/26

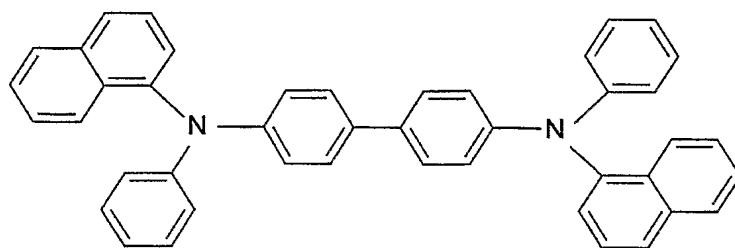

α -NPB

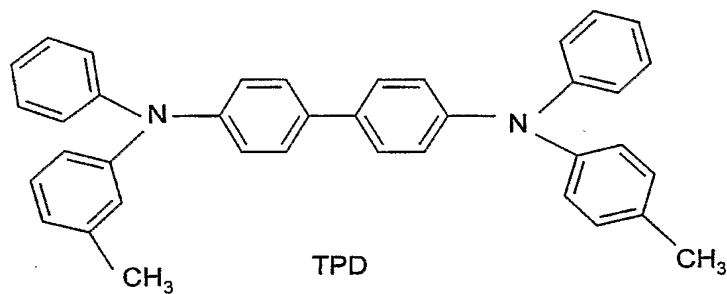

TPD

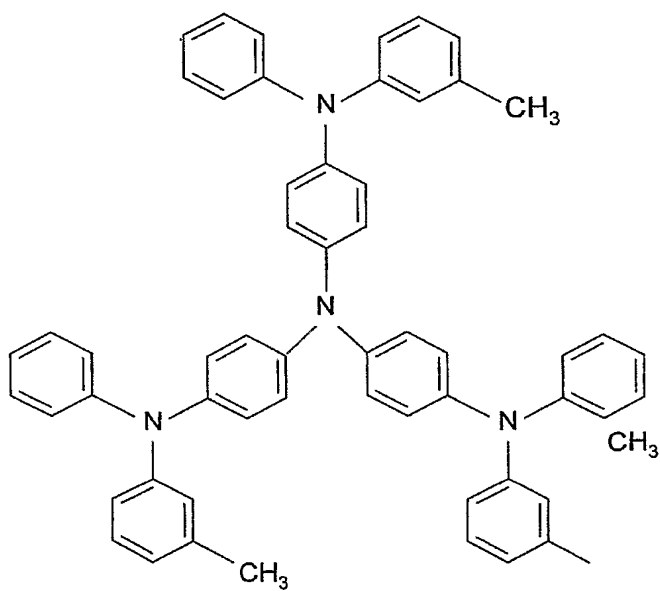

mTADATA

Fig. 8



9/26

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/TCTA : Compound A (38 : 2.1 nm)/LiQ (30 nm)/LiF (0.5 nm)/Al

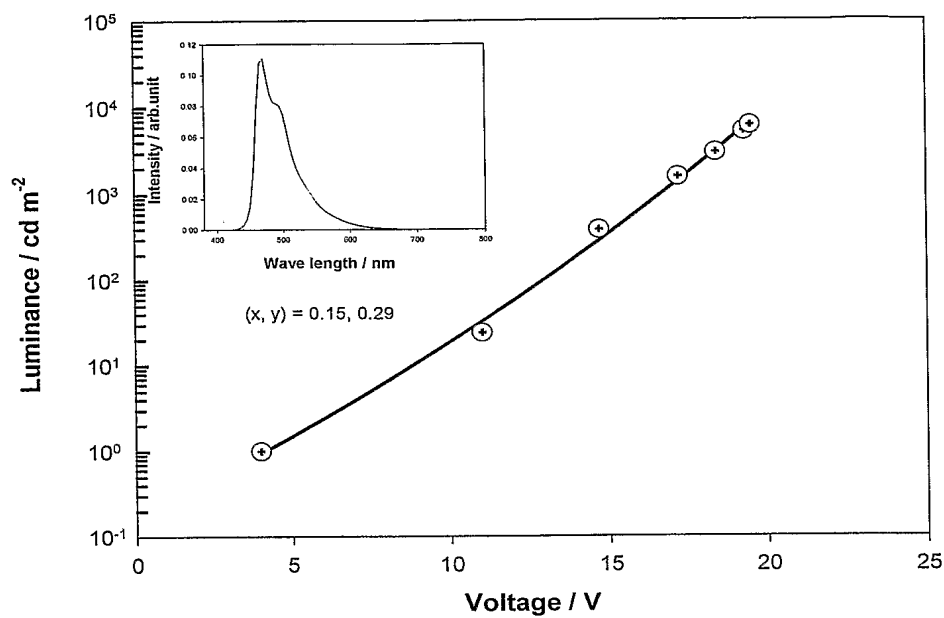


Fig. 9a

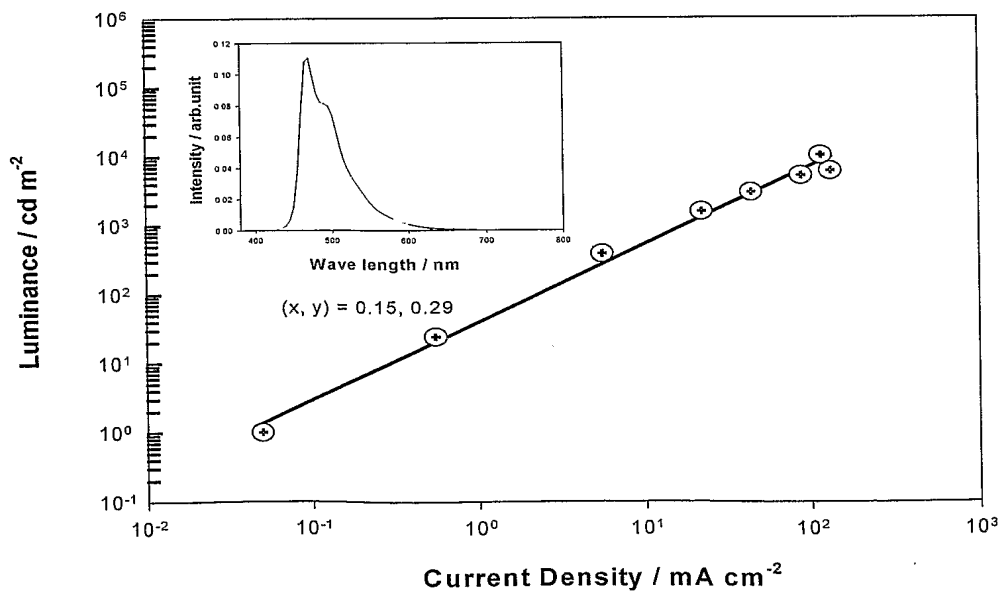


Fig. 9b



10/26

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/TCTA : Compound A (38 : 2.1 nm)/Liq (30 nm)/LiF (0.5 nm)/Al

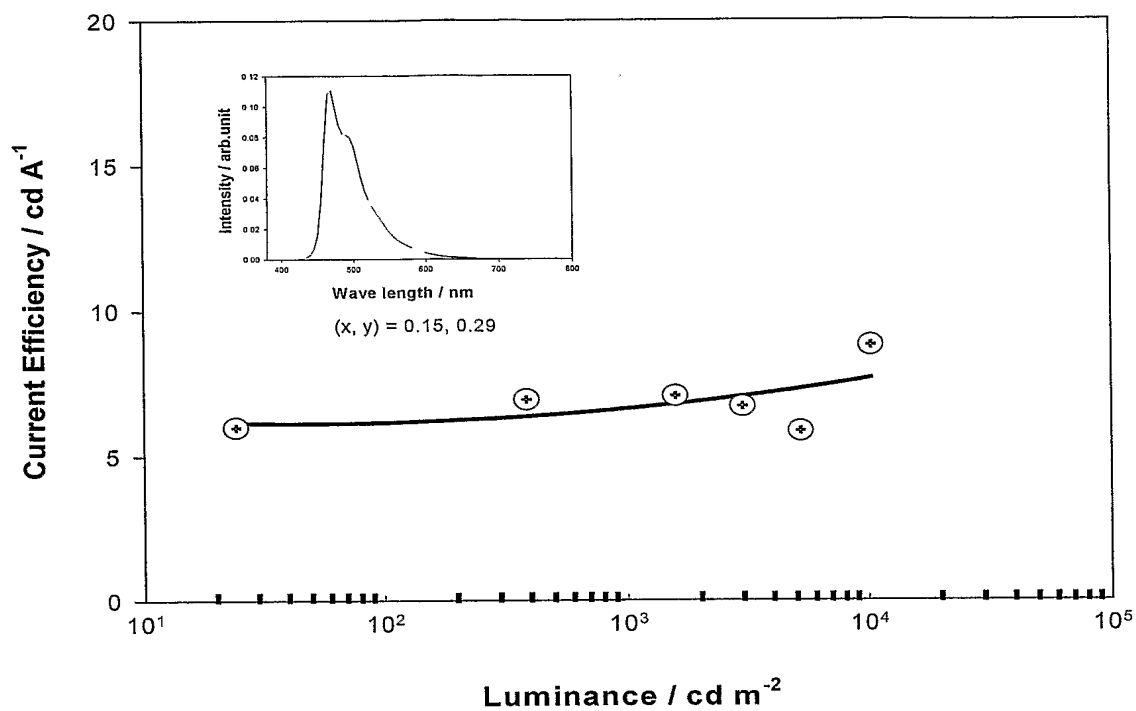


Fig. 9c



11/26

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/TCTA : Compound F (37 : 3 nm)/Compound B (3 nm)/Zr_q4 (30 nm)/LiF (0.5 nm)/Al

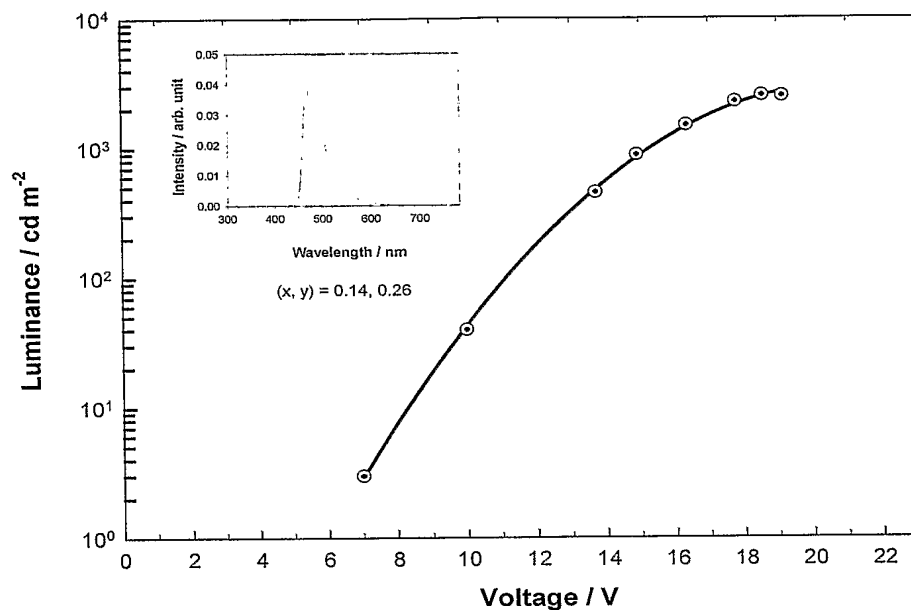


Fig. 10a

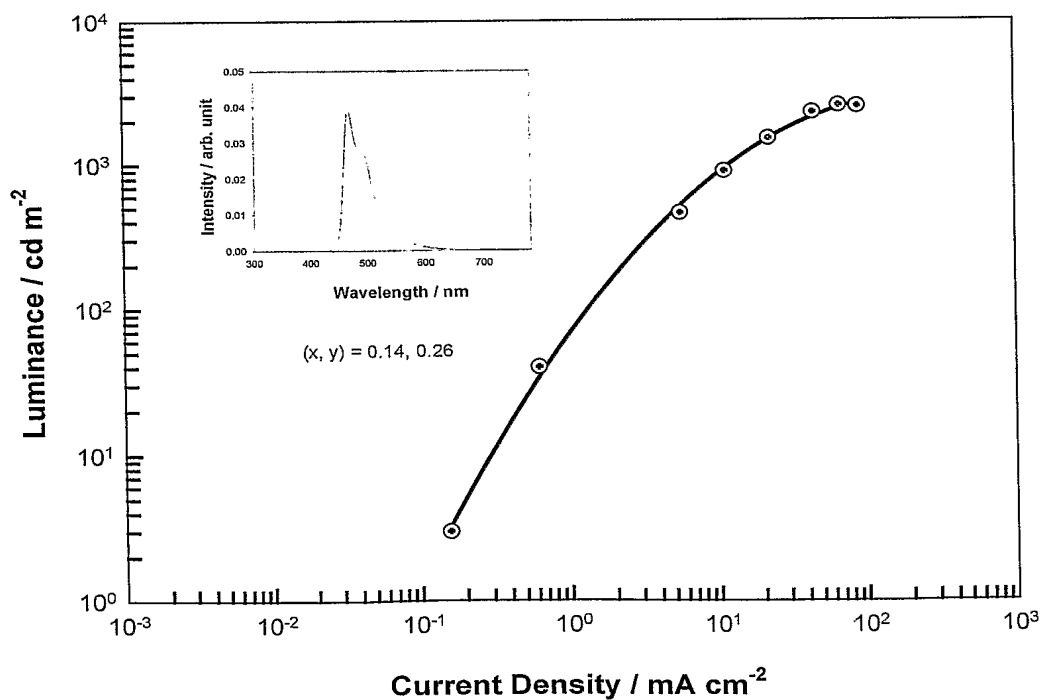


Fig. 10b



12/26

ITO (165 nm)/CuPc (25 nm)/ \square -NPB (40 nm)/TCTA : Compound F (37 : 3 nm)/Compound B (3 nm)/Zr_q4 (30 nm)/LiF (0.5 nm)/Al

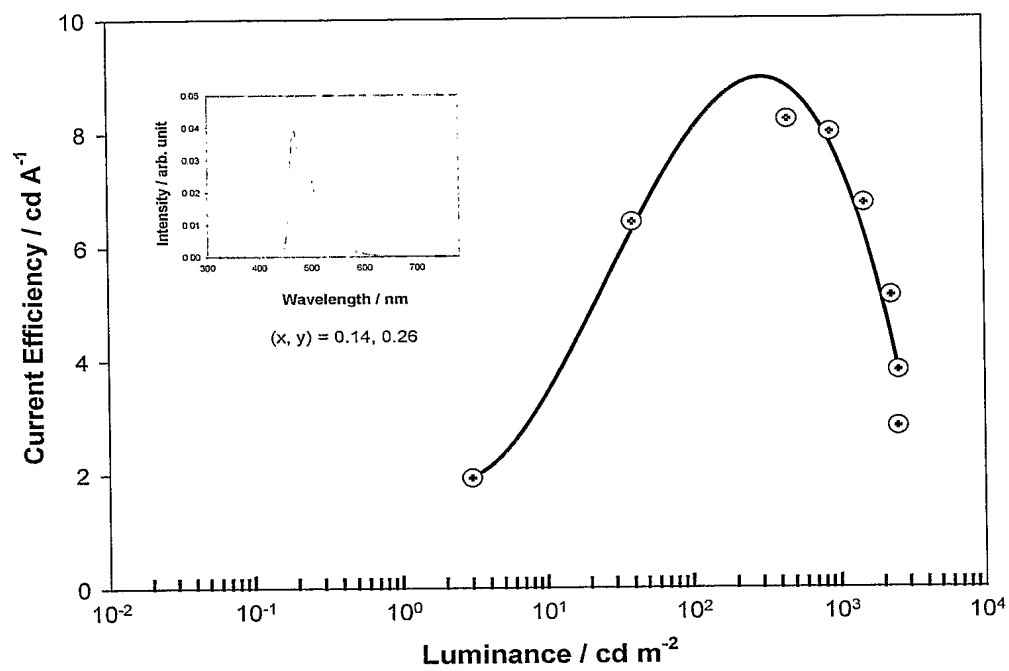


Fig. 10c



ITO (165 nm)/CuPc (25 nm)/ α -NPB (60 nm)/CBP : Compound D (20 : 1.3 nm)/BCP (6 nm)/Alq₃ (40 nm)/LiF (0.2

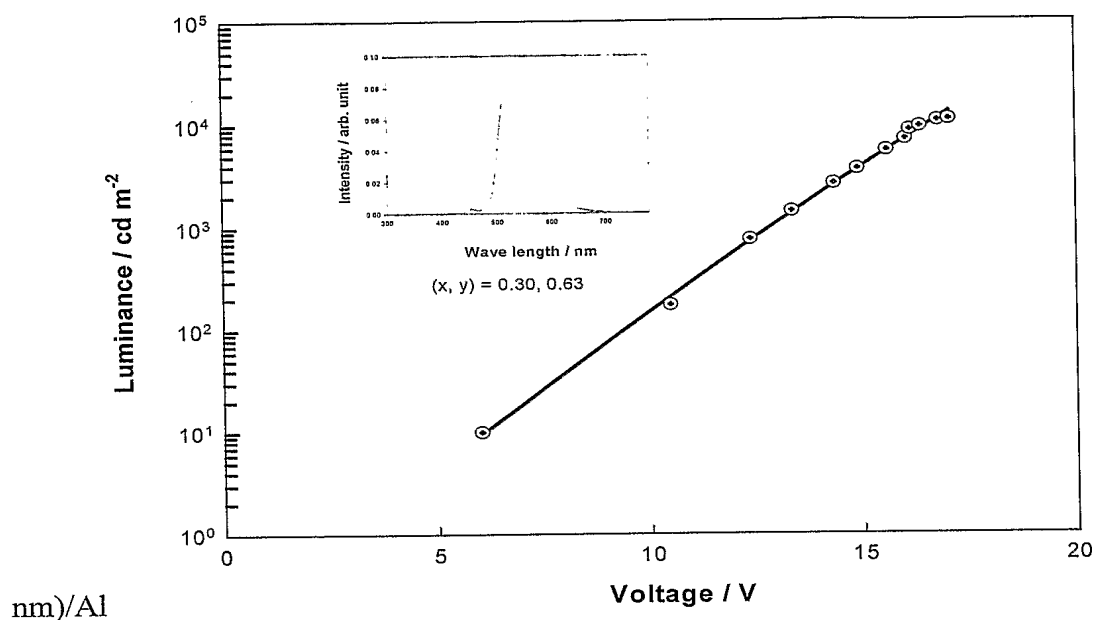


Fig. 11a

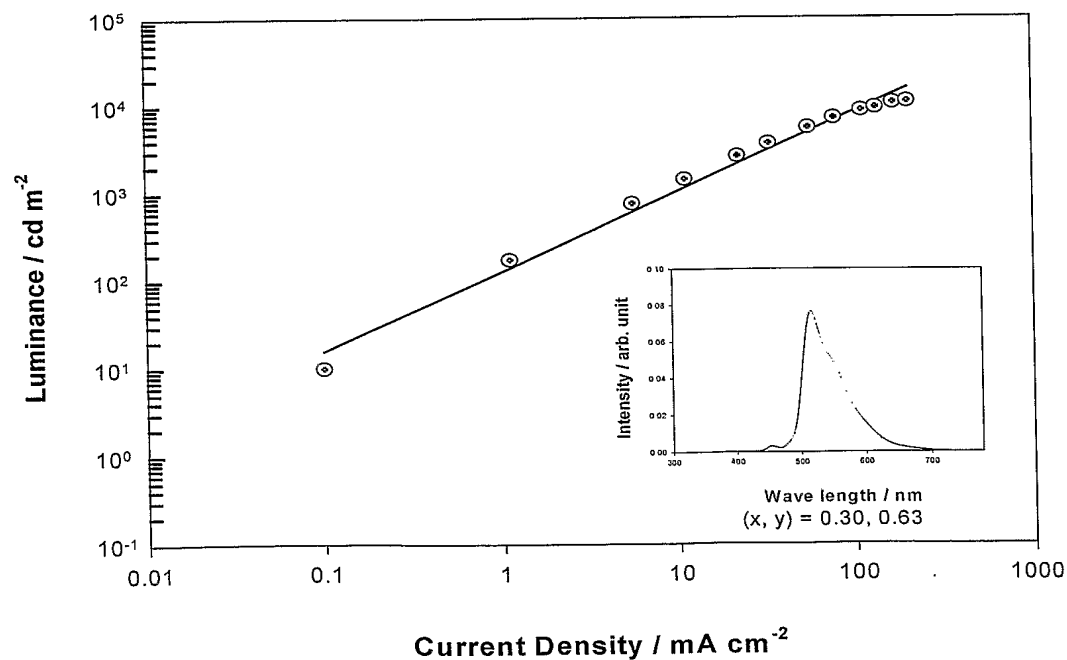


Fig. 11b



ITO (165 nm)/CuPc (25 nm)/ α -NPB (60 nm)/CBP : Compound J (20 : 1.3 nm)/BCP (6 nm)/Alq₃ (40 nm)/LiF (0.2 nm)/Al

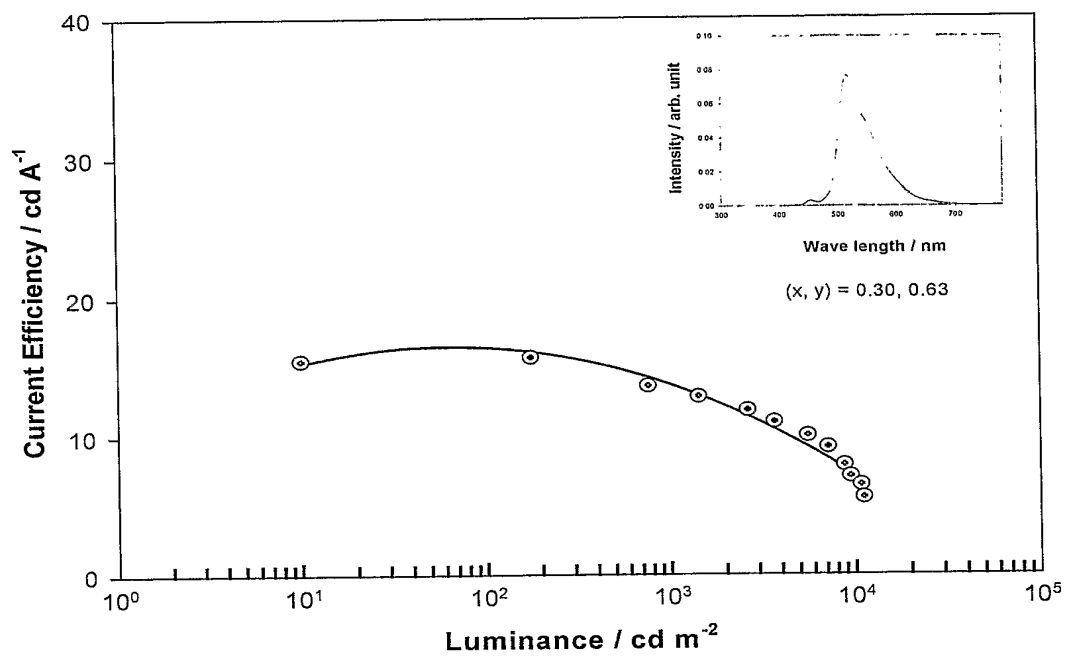


Fig. 11c



ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/CBP : Compound D (20 : 0.6 nm)/BCP (6 nm)/LiQ (40 nm)/LiF (0.5 nm)/Al

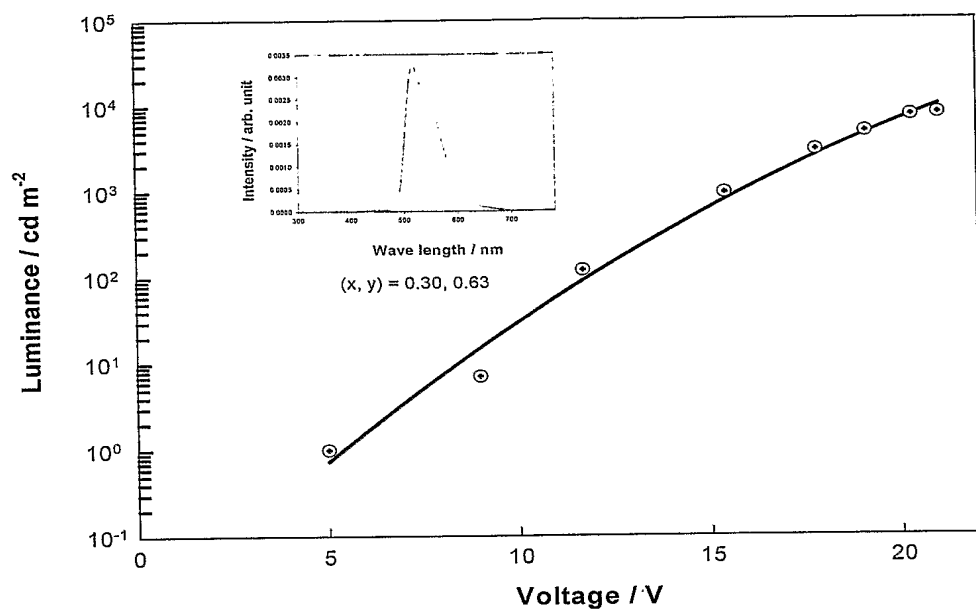


Fig. 12a

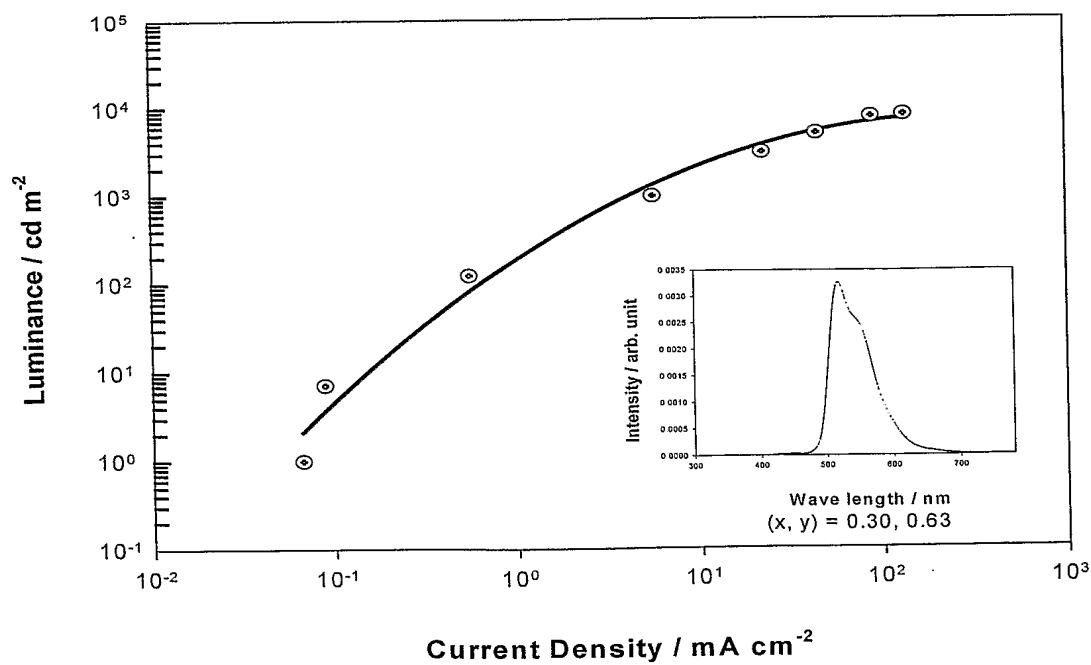


Fig. 12b



16/26

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/CBP : Compound D (20 : 0.6 nm)/BCP (6 nm)/LiQ (40 nm)/LiF (0.5 nm)/Al

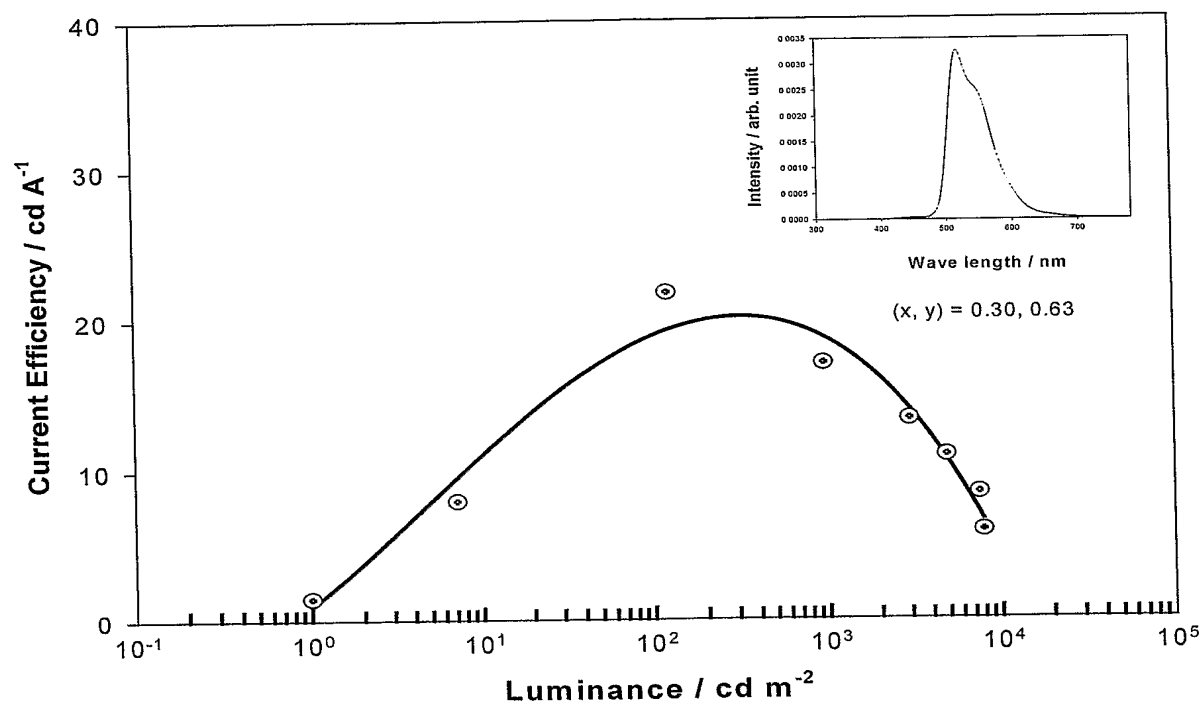


Fig. 12c



ITO (165 nm)/ α -NPB (40 nm)/CBP : Compound D (20 : 7 nm)/BCP (10 nm)/Zr_q4 (50 nm)/LiF (0.5 nm)/Al

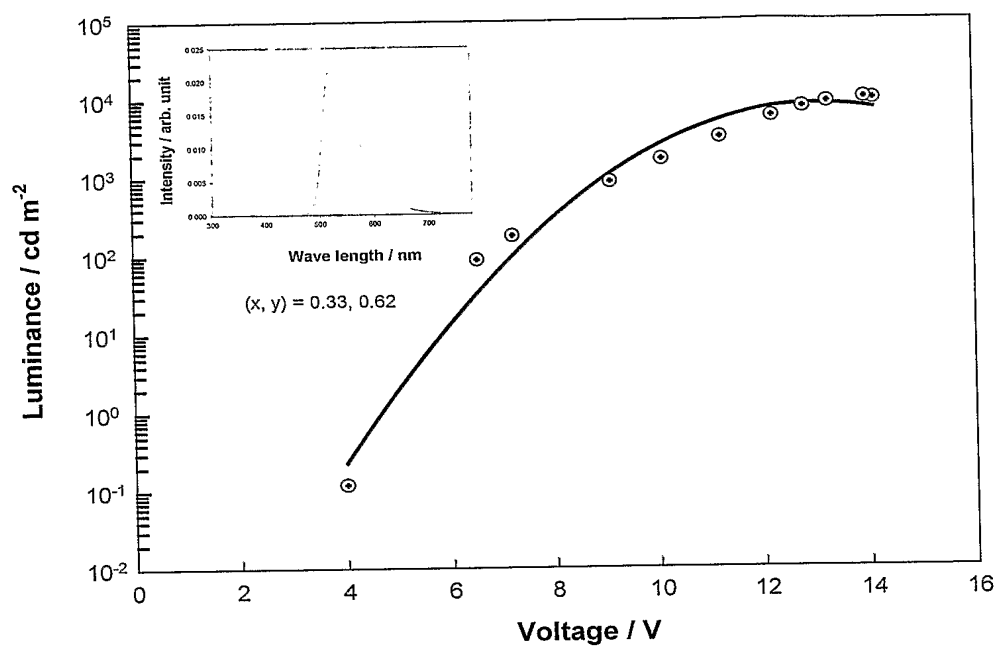


Fig. 13a

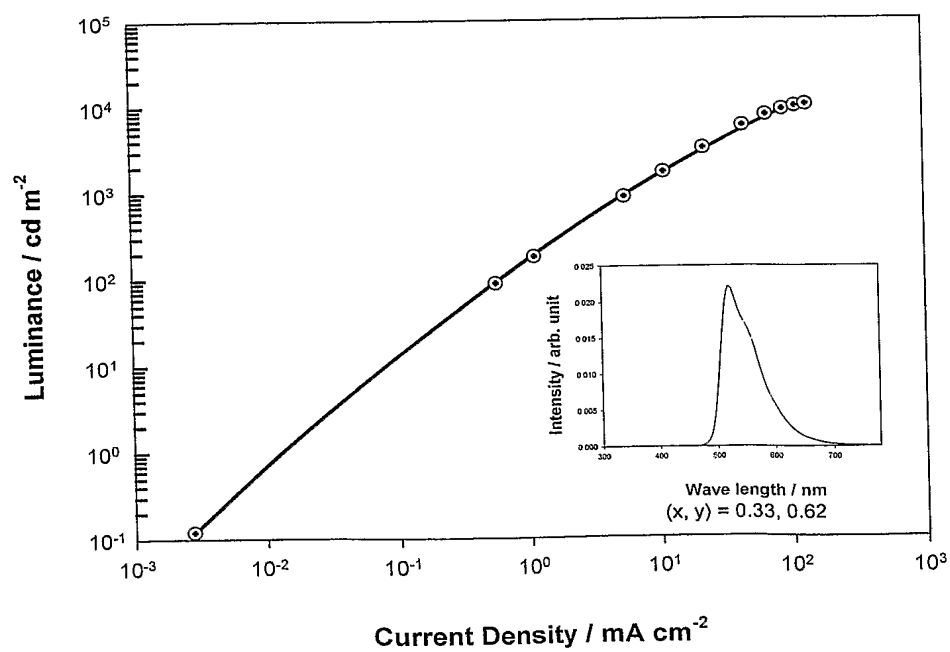


Fig. 13b



ITO (165 nm)/ α -NPB (40 nm)/CBP : Compound D (20 : 7 nm)/BCP (10 nm)/Zr_q4 (50 nm)/LiF (0.5 nm)/Al

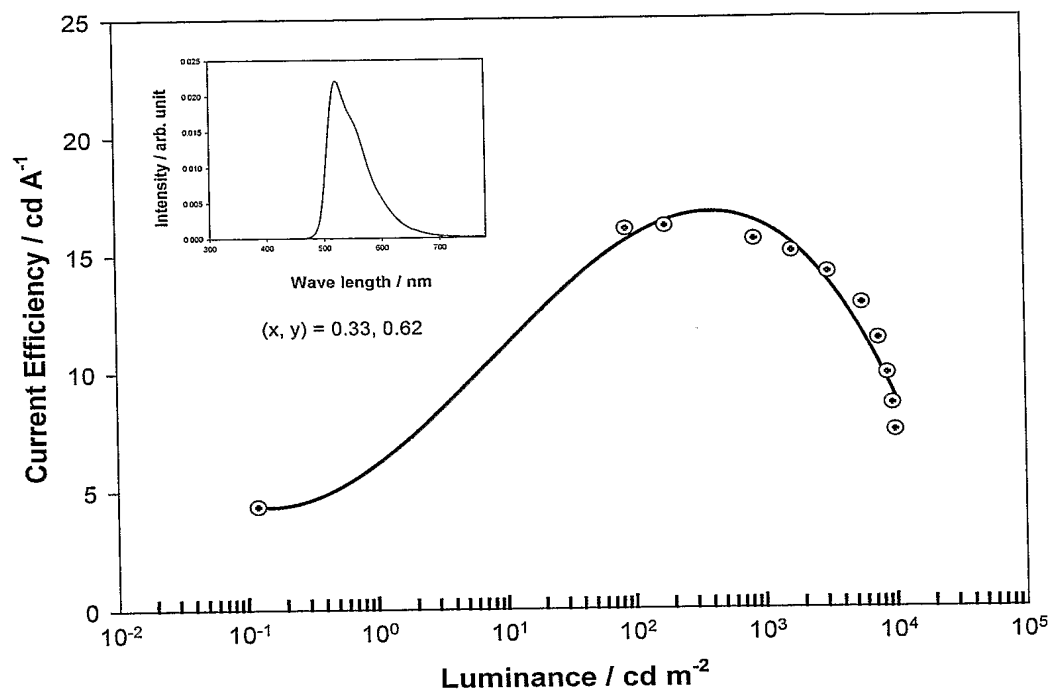


Fig. 13c



ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/TCTA : Compound C (40 : 0.8 nm)/LiF (30 nm)/LiF (0.5 nm)/Al

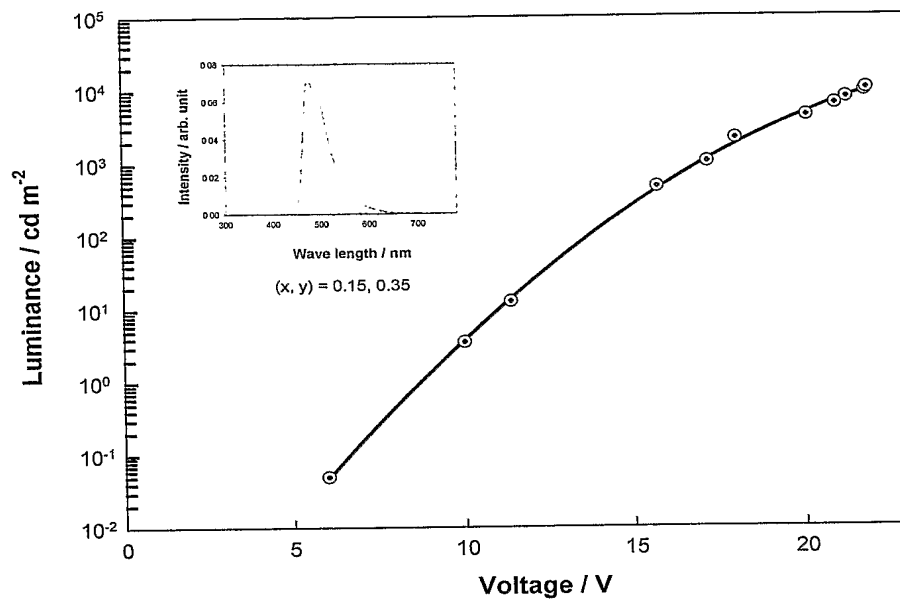


Fig. 14a

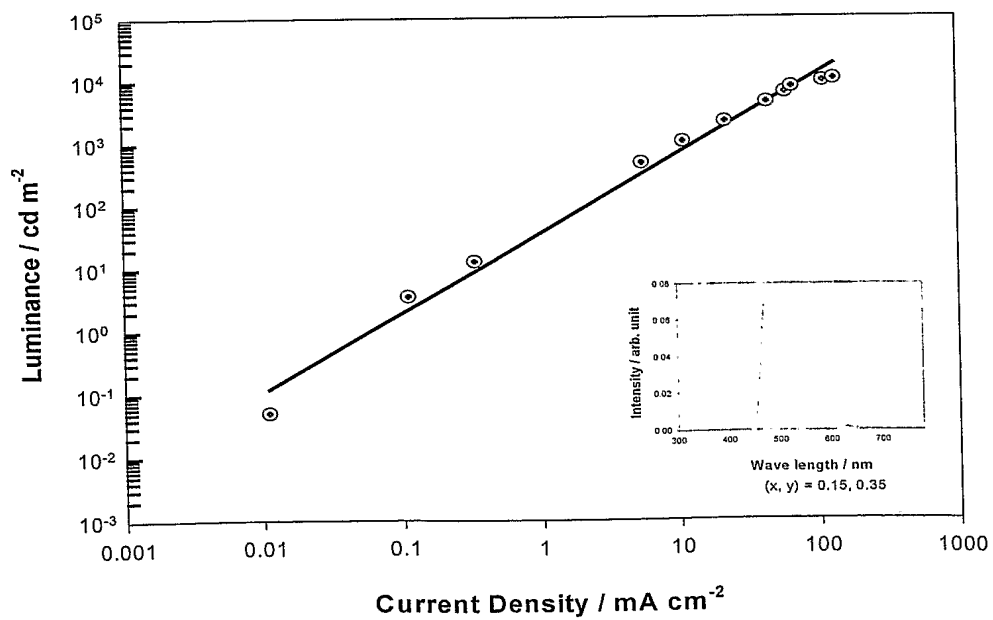


Fig. 14b



20/26

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/TCTA : Compound C (40 : 0.8 nm)/LiF (30 nm)/LiF (0.5 nm)/Al

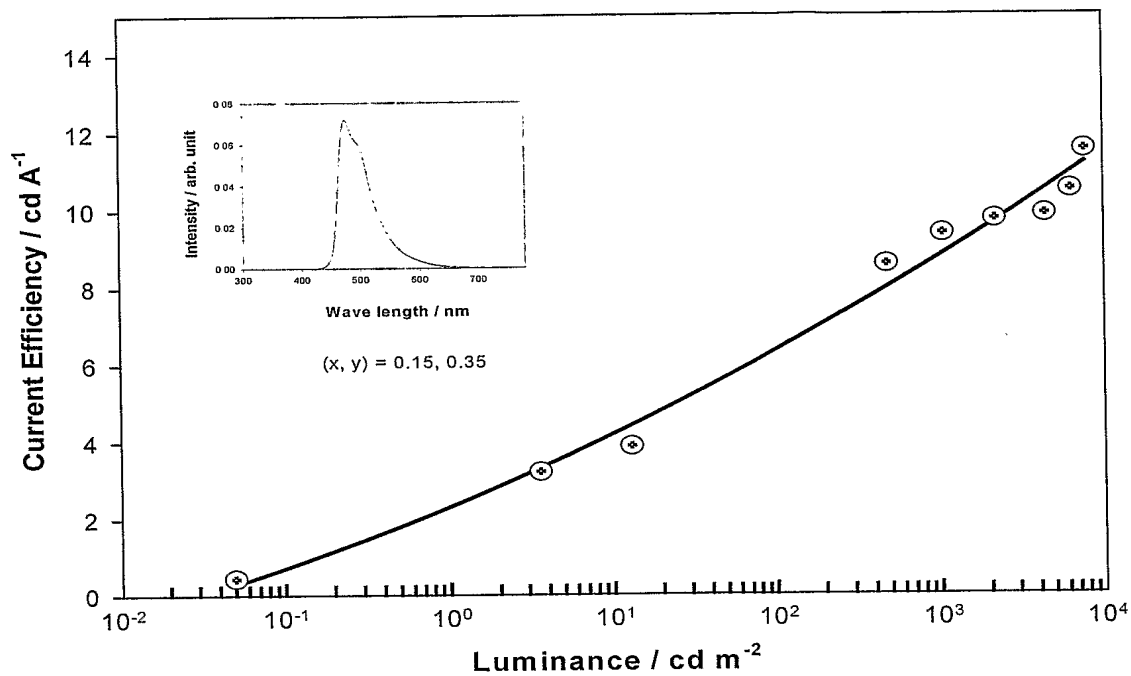


Fig. 14c



21/26

ITO (165 nm)/ α -NPB (40 nm)/CBP : Compound D (20 : 8.3 nm)/
Compound F (10 nm)/Zr_q4 (50 nm)/LiF (0.5 nm)/Al

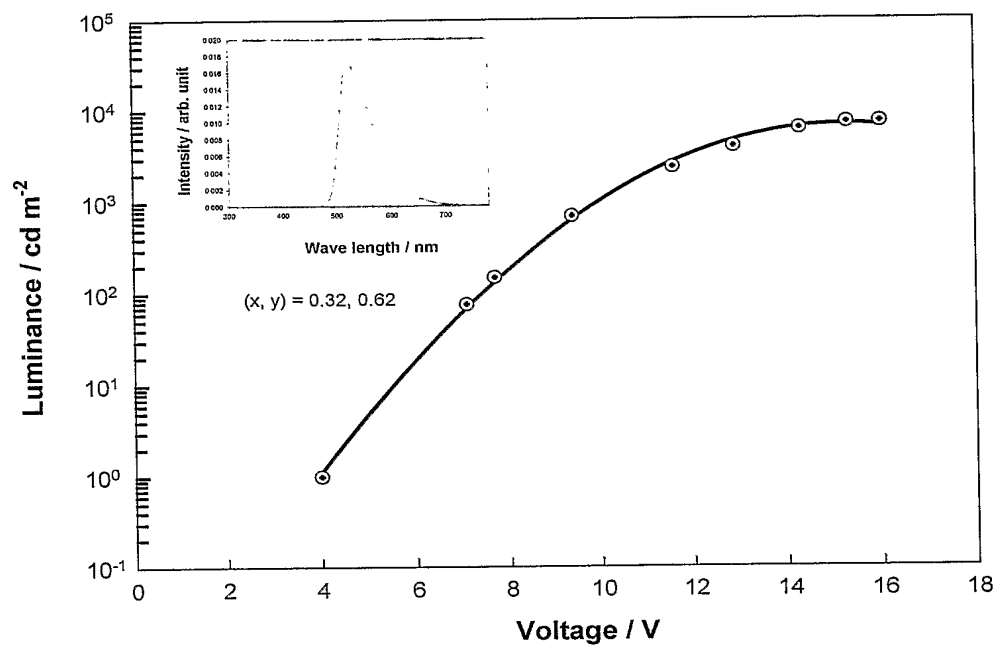


Fig. 15a

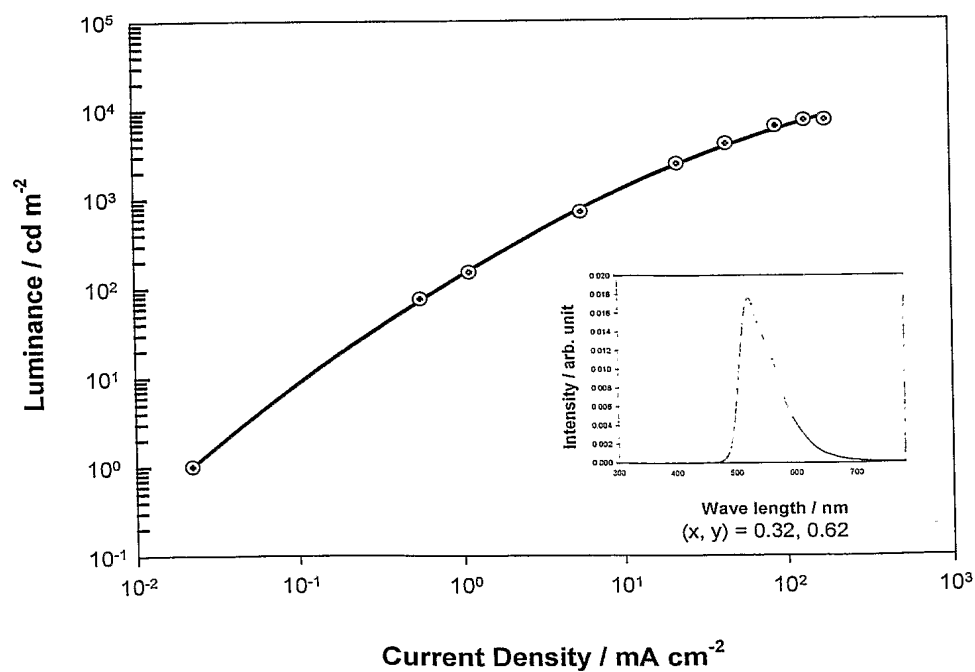


Fig. 15b



22/26

ITO (165 nm)/ α -NPB (40 nm)/CBP : Compound D (20 : 8.3 nm)/
Compound F (10 nm)/Zr_q4 (50 nm)/LiF (0.5 nm)/Al

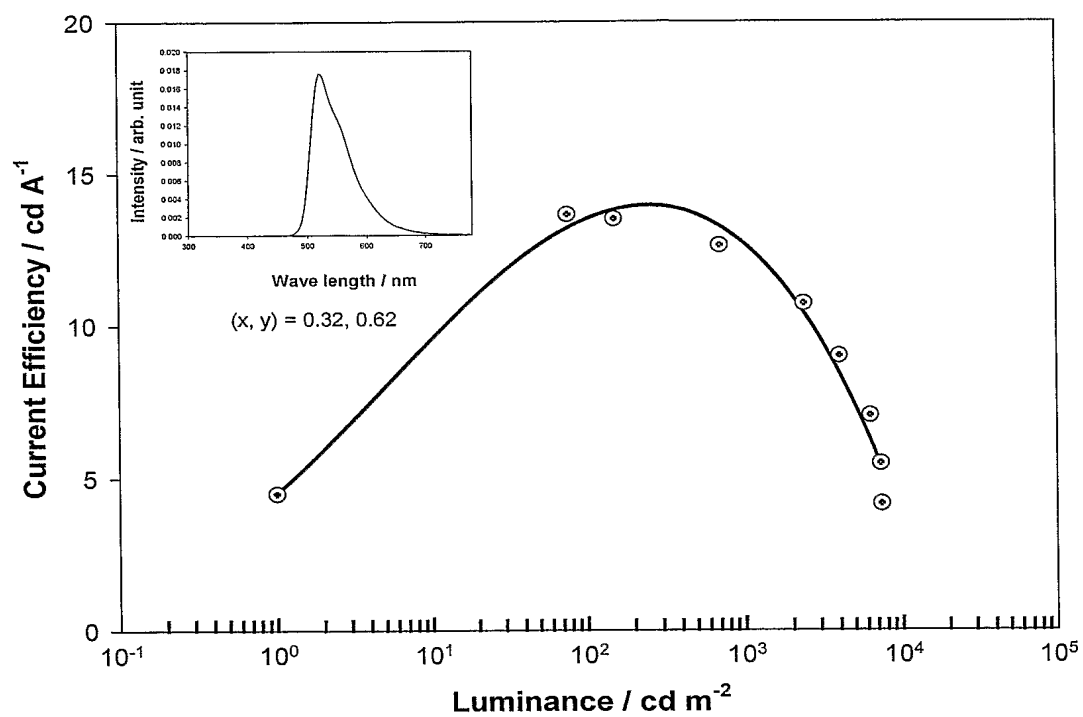


Fig. 15c



23/26

ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/CBP : Compound E (35 : 5 nm)/Zr_q4 (30 nm)/LiF (0.5 nm)/Al

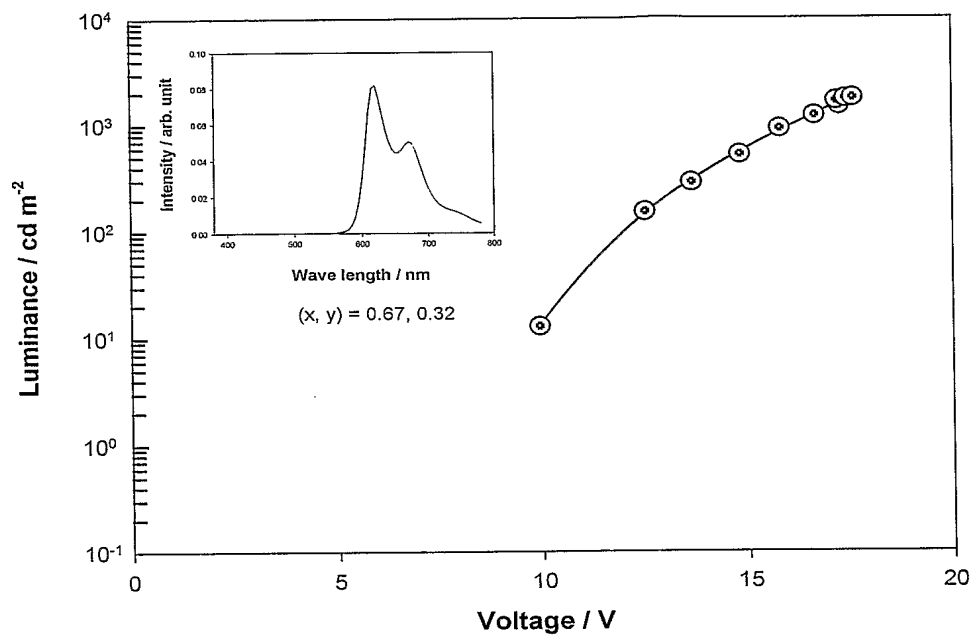


Fig. 16a

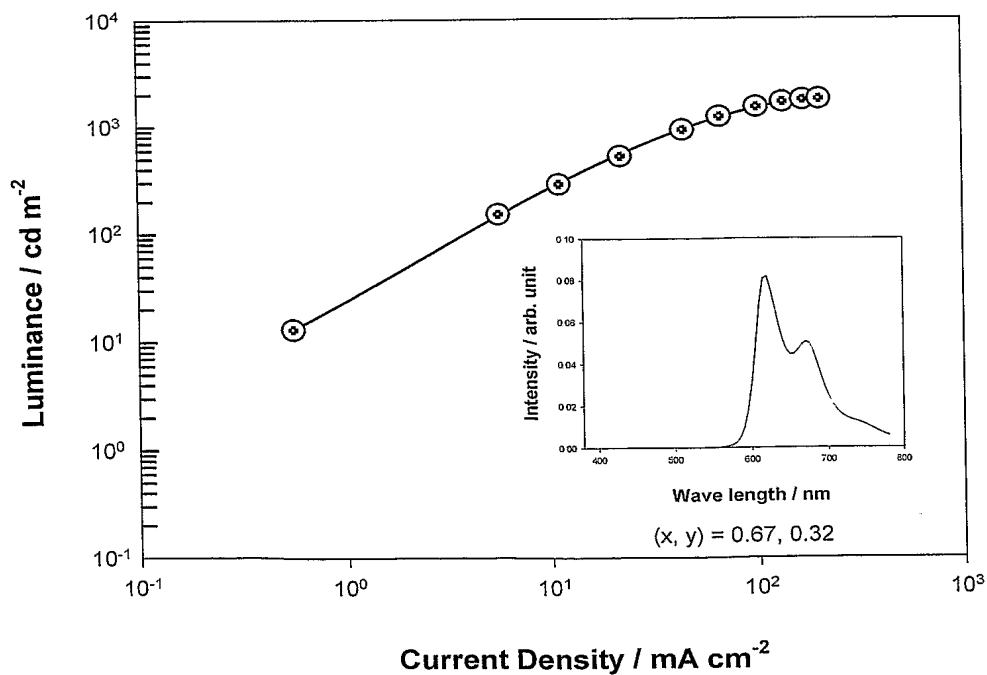


Fig. 16b



ITO (165 nm)/CuPc (25 nm)/ α -NPB (40 nm)/CBP : Compound E (35 : 5 nm)/Zr_q4 (30 nm)/LiF (0.5 nm)/Al

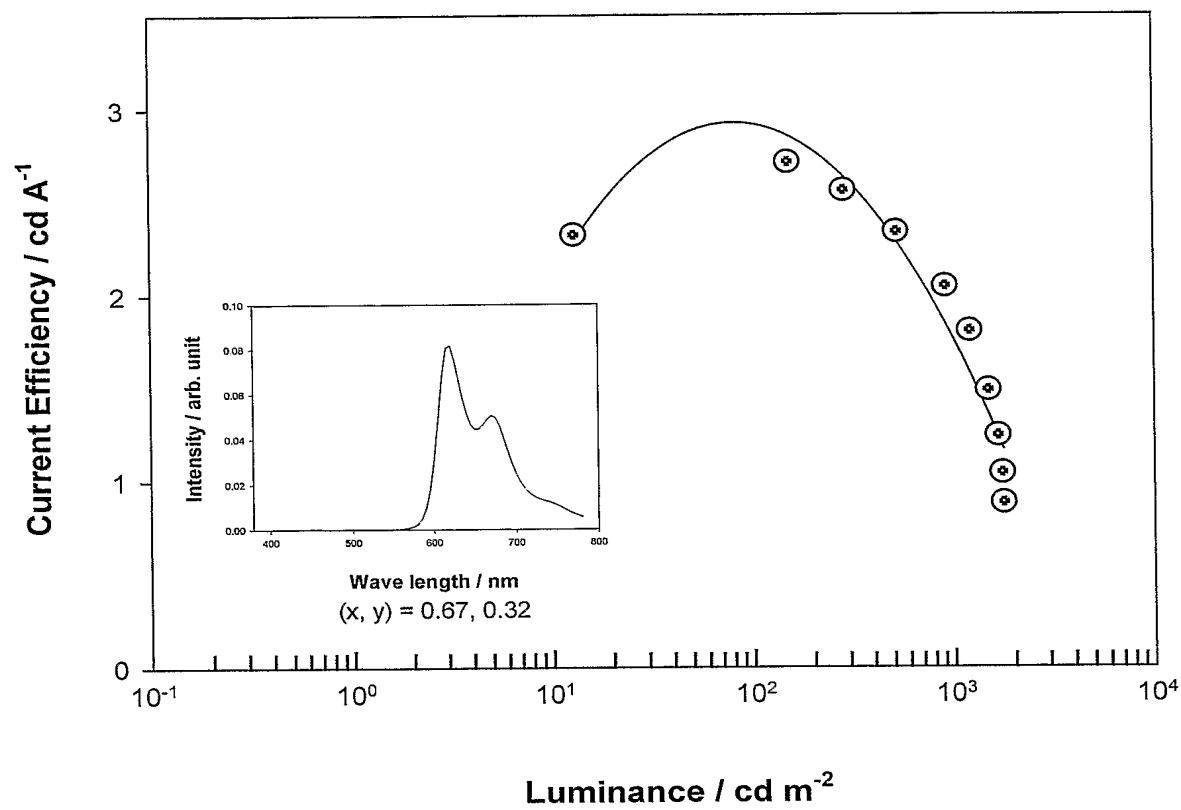


Fig. 16c



ITO (165 nm)/CuPc (50 nm)/ α -NPB (40 nm)/CBP : Compound D (20 : 6.1 nm)/Compound F (10 nm)/Zr_q (50 nm)/LiF (0.5 nm)/Al

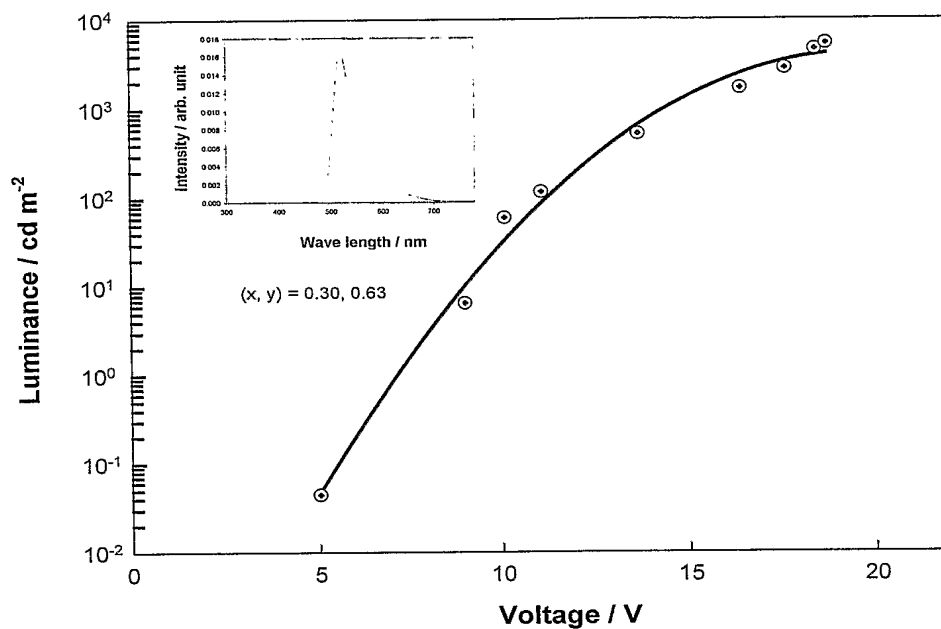


Fig. 17a

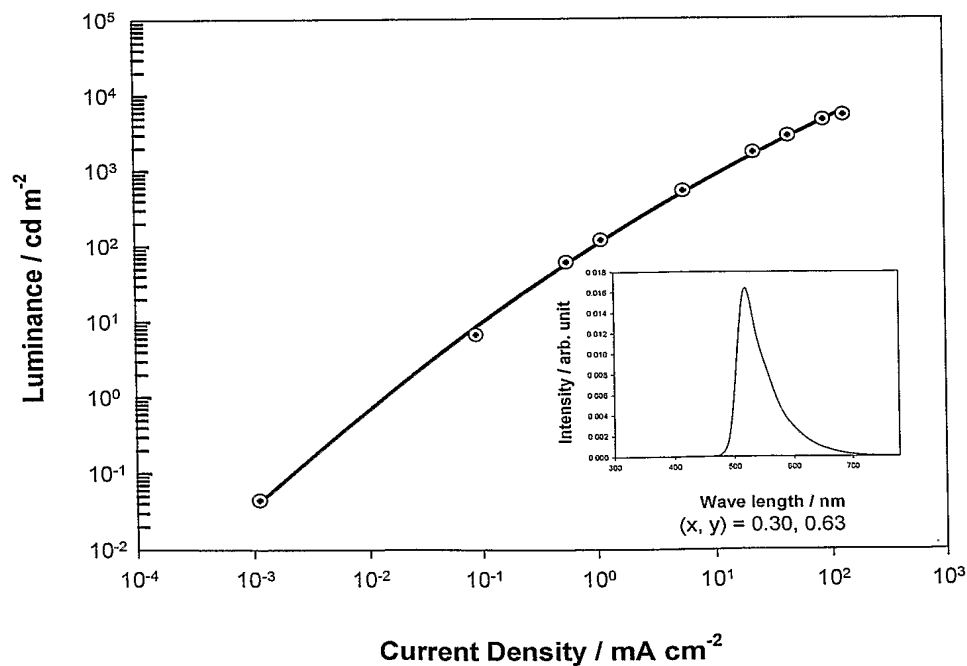


Fig. 17b

ITO (165 nm)/CuPc (50 nm)/ α -NPB (40 nm)/CBP : Compound D (20 : 6.1 nm)/Compound F (10 nm)/Zr_q4 (50 nm)/LiF (0.5 nm)/Al

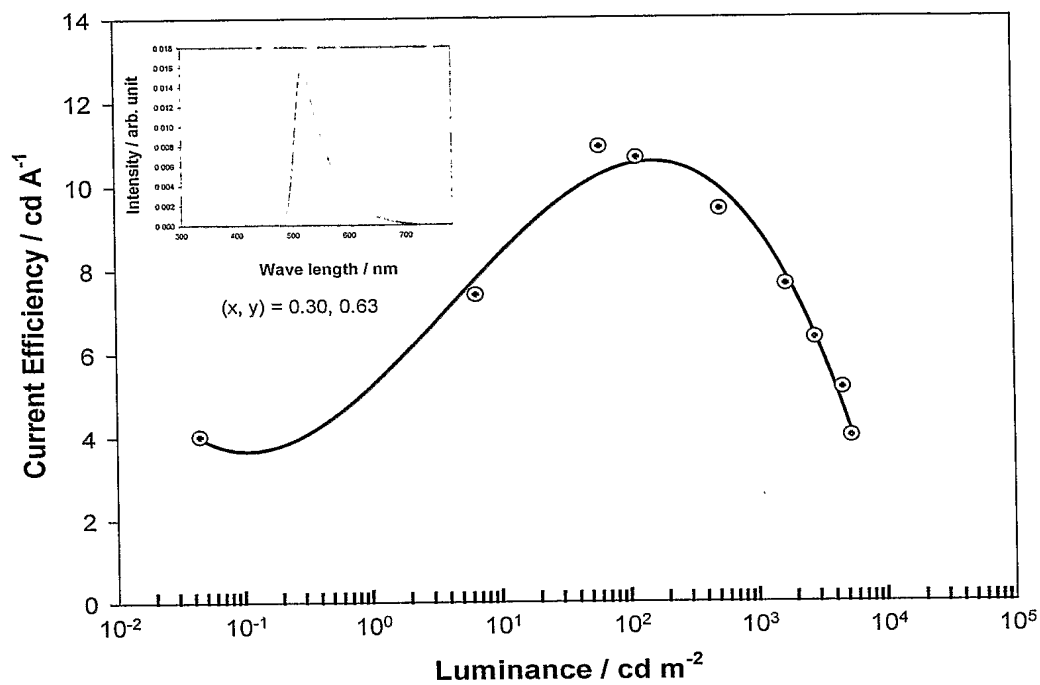


Fig. 17c

